

Upper South Creek

Advanced Water Recycling Centre and Pipelines

Community Agreement – AWRC Extended Working Hours - Rev G

EPL 21800

Contents

| | |
|---|-----------|
| Introduction | 3 |
| Scope of Works and Further Details | 3 |
| E1 Community Agreement..... | 3 |
| Condition E1.1 | 3 |
| Condition E1.2 | 4 |
| Condition E1.3 | 9 |
| Condition E1.4 | 9 |
| Condition E1.5 | 10 |
| Condition E1.6 | 10 |
| Condition E1.7 | 11 |
| Conclusion | 11 |
| Appendix 1 – OOHW Permit (Draft)..... | 12 |
| Appendix 2 – Community Consultation Record | 13 |
| Appendix 3 – Gatewave Noise Model | 14 |

Introduction

The Upper South Creek Advanced Water Recycling Centre (AWRC) (the project) has been proposed to support the population growth and economic development of the Western Sydney Aerotropolis Growth Area (WSAGA or Aerotropolis), South West Growth Area (SWGA) and the new Western Sydney International Airport. The project will provide wastewater services to Western Sydney to produce high-quality treated water for non-drinking reuse and for release to local waterways. John Holland has been appointed by Sydney Water to deliver the project works, with detailed design and construction for treating a daily wastewater flow of up to 35ML/day.

John Holland has obtained Environment Protection Licence (EPL 21800) from the NSW Environment Protection Authority for the construction of the project and has prepared the following written report for submission to the EPA as John Holland are seeking to undertake work outside of approved construction hours following community consultation and agreement (EPL condition E1).

Scope of Works and Further Details

John Holland proposes to extend the standard construction hours specified in EPL 21800 condition L5.1 at the AWRC plant site on Clifton Avenue, Kemps Creek via agreement from the community, in accordance with condition E1 of the licence. The project is seeking a community agreement under the following 3 scenarios:

| | | | |
|------------|------------------|-------------------------|-----------------------|
| Scenario 1 | Monday to Friday | 5am – 7am | Concrete Pours |
| Scenario 2 | Monday to Friday | 6am – 7am | General Construction* |
| Scenario 3 | Saturday | 6am - 8am and 1pm – 5pm | General Construction* |

The primary purpose of this community agreement is to enable the project to better manage traffic impacts on Clifton Avenue and Elizabeth Drive. Extended hours will enable deliveries and vehicle arrival times to be further spaced out, minimizing congestion, and reducing the frequency and quantity of vehicles occupying the 2 key roads (Clifton and Elizabeth) that are already under pressure from surrounding major projects.

Indirectly, obtaining a community agreement to assist with reducing traffic impacts will also assist with achieving better concrete supply reliability and quality outcomes which in turn assists with achieving the required structural integrity and specification outcomes on site and reducing the risk of rework.

E1 Community Agreement

Condition E1.1

Work outside standard construction hours – community consultation and agreement.

The licensee may work outside standard construction hours (as defined in L4.1) in circumstances other than those permitted under conditions L4.3, L4.4, or any other condition of this licence if the Licensee:

a) undertakes community consultation and agreement as described in E1.2;

- The project has undertaken community consultation with the affected residents that were identified in the noise model.

b) submits to the EPA a written request to work outside the standard construction hours attaching information set out in E1.3; and

- This document details information to work outside the standard construction hours. Specifically, the project is seeking approval to work for the following additional hours:

| | | | |
|------------|------------------|-------------------------|----------------------|
| Scenario 1 | Monday to Friday | 5am – 7am | Concrete Pours |
| Scenario 2 | Monday to Friday | 6am – 7am | General Construction |
| Scenario 3 | Saturday | 6am - 8am and 1pm – 5pm | General Construction |

- The project would like to include the following hours for the next 12 months and the community will be consulted every 3 months to ensure ongoing support.

c) obtains approval by the EPA to work outside standard construction hours. The EPA may, in exercising its discretion to approve the works outside standard construction hours, review whether the licensee has obtained community agreement. Specifically, whether a substantial majority of the individual Noise Sensitive Receivers who together comprise the Community Affected Catchments and were contacted has consented to the planned works out of standard hours.

- John Holland notes that approval must be obtained from the EPA to undertake the work proposed in this community agreement.

| | | |
|------------|----------------------|---------------|
| Scenario 1 | 3 impacted residents | 3/3 Consented |
| Scenario 2 | 9 impacted residents | 8/9 Consented |
| Scenario 3 | 9 impacted residents | 8/9 Consented |

Condition E1.2

Requirements for community consultation and agreement

Any community consultation and agreement undertaken with respect to the proposed out of hours works (OOHW) must:
a) *be prepared and implemented in accordance with the Interim Construction Noise Guidelines (DEC 2009), the Noise Policy for Industry (EPA, 2017) and AS2436-2010: Guide to noise and vibration control on construction, demolition and maintenance sites;*

- The Out of Hour Works Permit and community consultation detailed in Appendix 1 and Appendix 2 respectively has been prepared in accordance with the Project approved Noise and Vibration CEMP sub-plan (NVCSP) which considers the guidelines above.

b) *include consultation of all noise sensitive receivers within the Community Affected Catchments. This includes Noise Sensitive Receivers that have declined to participate in previous agreements unless a community member has explicitly requested not to be involved in any future consultation about future OOHW;*

- Note that structure construction was used as the reference noise model due to it being the louder of the 2 models referenced in this community agreement.
- Scenario 1: As detailed in the project noise model (Gatewave Renzo Tonin - Appendix 3), 3 residences were identified as being impacted by the proposed works and are presented in Figure 1.
 - 146B CLIFTON AVENUE, KEMPS CREEK, NSW (2 db (A) above NML)
 - 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW (2 db (A) above NML)
 - 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW (3 db (A) above NML)



Figure 1: Impacted Receivers for Scenario 1 (Concrete Pour starting at 5am)

- Scenario 2 and 3: As detailed in the project noise model (Gatewave Renzo Tonin - Appendix 3) 12 residences were identified as being impacted by the proposed works and are presented in Figure 2A, 2B and 2C.
 - 146B CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML)
 - 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML)
 - 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW (20 db (A) above NML)

4. 919-929 MAMRE ROAD, KEMPS CREEK, NSW (16 db (A) above NML)
5. 257 CLIFTON AVENUE, KEMPS CREEK, NSW (16 db (A) above NML)
6. 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW (15 db (A) above NML)
7. 949-965 MAMRE ROAD, KEMPS CREEK, NSW (15 db (A) above NML)
8. 258 CLIFTON AVENUE, KEMPS CREEK, NSW (15 db (A) above NML)
9. 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW (14 db (A) above NML)

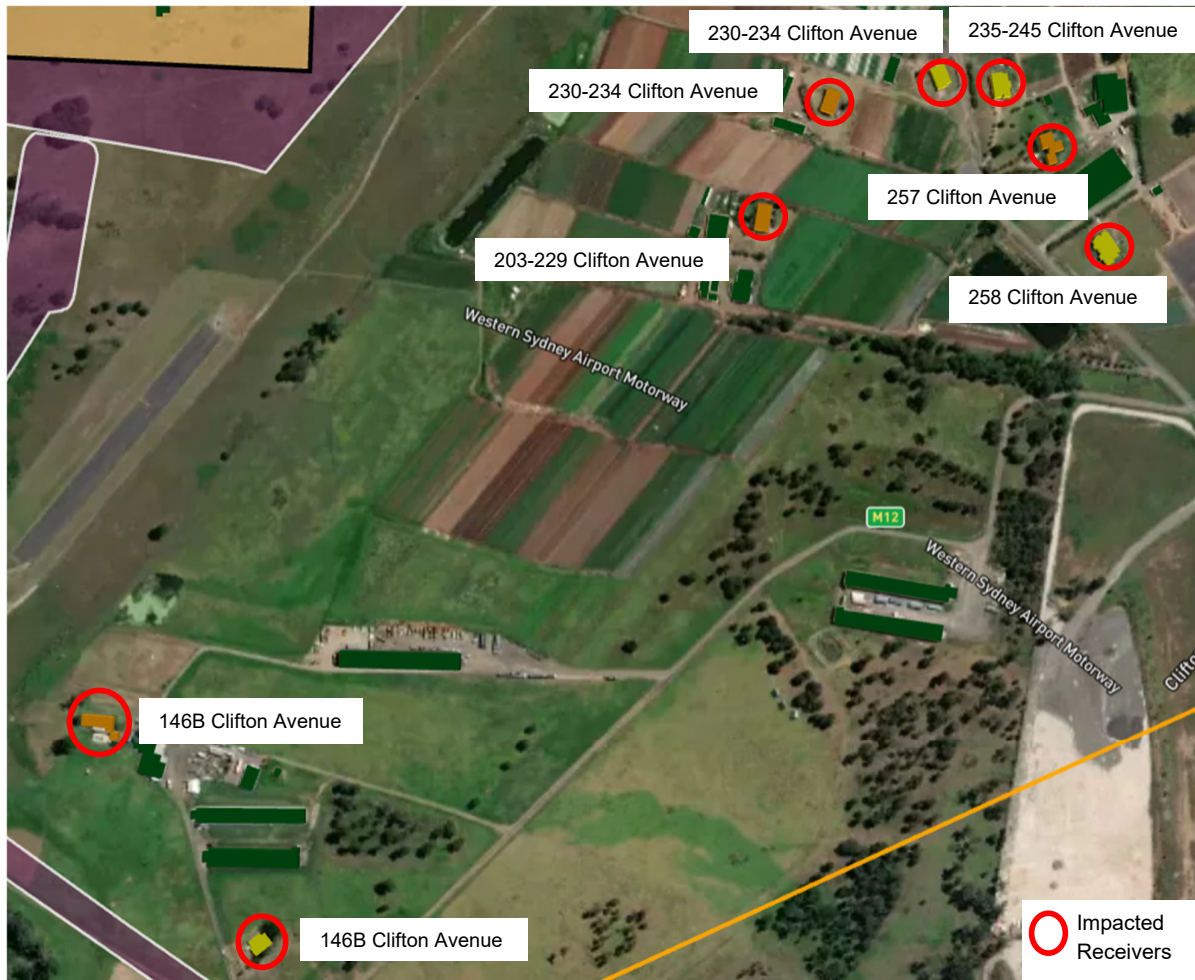


Figure 2A: Impacted Receivers for Scenario 2 and 3 (Structure Construction)



Figure 2B: Impacted Receivers for Scenario 2 and 3 (Structure Construction)



Figure 2C: Impacted Receivers for Scenario 2 and 3 (Structure Construction)

- All residents (except for one due to terminal illness and at the instruction of Sydney Water) have been consulted and have provided their consent for the works to take place. The residents did not raise any objections or issues with the works moving forward. Refer to Appendix 2 for further details.

c) ensure that the noise sensitive receivers understand the nature of the works and any predicted impacts, including that consideration is made of additional requirements relevant to the needs of culturally and linguistically diverse Noise Sensitive Receivers, and include details for interpreting services for languages other than English where required.

- The project team has a pre-existing relationship with all of the sensitive receivers and there was no requirement for translating and interpreting services to support the conversation about the proposed works for 8 of the residents. The 9th receiver (230-234 Clifton Avenue) is culturally and linguistically diverse; the team uses text message to communicate as he can use Google Translate.
- Appendix 2 documents the consultation that was done with each resident.

d) include in the community consultations with Noise Sensitive Receivers the following information:

i. the actual works proposed;

- Scenario 1: The project is proposing to start concrete pours at 5am on Monday to Fridays. This is due to the traffic and congestion along Elizabeth Drive as well as to avoid the hottest part of the day which will minimise the associated structural integrity and quality risk to concrete which may lead to formation of 'cold joint' and rework.
- Scenario 2 and 3: The project is proposing to start general construction works at 6am on Monday to Fridays and 1pm to 6pm on Saturdays. This will allow the construction team to coordinate arrival and departure times to/from site which will reduce construction traffic impacts to Elizabeth Drive and Clifton Avenue. It will also reduce impacts to nearby residents and road users as the total number of workforce on the site at any given time will be reduced thus mitigating potential health and safety risks to workforce caused by interaction with traffic and plant onsite.

ii. any expected impacts in clear, plain English based on noise modelling;

- Scenario 1: The works has been noise modelled and is expected to be NOTICEABLE (based on the CNVIS). We would compare this to the sound of a refrigerator idling. The maximum noise level for these works is 3 dB(A) above the noise management level (36 dB(A)).

- Scenario 2: The works has been noise modelled and is expected to be CLEARLY AUDIBLE to MODERATELY INTRUSIVE (based on the CNVIS). We would compare this to the sound of a dishwasher in the next room. The maximum noise level for these works is 19 dB(A) above the noise management level (i.e., 36 dB(A)).
- Scenario 3: The works has been noise modelled and is expected to be CLEARLY AUDIBLE (based on the CNVIS). We would compare this to the sound of a dishwasher in the next room. The maximum noise level for these works is 16 dB(A) above the noise management level (i.e., 40 dB(A)).

iii. the expected duration of the works;

- The works are planned to be undertaken throughout March 2025 and will continue for the 3 months to May 2025. The residents were consulted and had no objection with the frequency in consultation of every 3 months. The residents advised that they will raise any issues with John Holland's community manager as they arise.

iv. any expected benefits for receivers;

- Not applicable

v. any other known concurrent OOHW that will be occurring; and

- Scenario 1: Seymour Whyte, who are constructing the M12 project, will potentially be working in the same noise catchment area, in accordance with a community agreement to commence works at 5am for days where the temperature is above 30°C. There are three residents that will overlap with M12, however all 3 have provided consent for this community agreement.
- Scenario 2: Seymour Whyte, who are constructing the M12 project, will potentially be working in the same noise catchment area, in accordance with a community agreement to commence works at 6am. There are three residents that will overlap with M12, however all 3 have provided consent for this community agreement.
- Scenario 3: Seymour Whyte, who are constructing the M12 project, will potentially be working in the same noise catchment area, however their EPL permits them to work on Saturdays from 8am to 6pm under standard construction hours. Therefore, there are no concurrent OOHW occurring.

vi. any other OOHW that will be occurring on the nights preceding and following the proposed works or, if the proposed work precedes or follows a weekend period, any other OOHW that will be occurring on the weekend.

- No other works are planned to occur OOHW at the time of community agreement

vii. request consent from the Noise Sensitive Receiver for their responses to be provided to the EPA;

- Consent has been received by all residents identified for each scenario in the noise model and have been detailed in Appendix 2.

viii. ensure that a record is kept when a licensee is unable to contact a noise sensitive receiver after three attempts, including leaving "sorry I missed you" cards explaining the reason for the visit and requesting a return phone call; and

- Not applicable, all impacted receivers have provided their consent for all three scenarios.
 - 146B CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the same day. Refer to Appendix 2 for details.
 - 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the same day. Refer to Appendix 2 for details
 - 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW (20 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the same day. Refer to Appendix 2 for details
 - 919-929 MAMRE ROAD, KEMPS CREEK, NSW (16 db (A) above NML). Address is used as training facility. Refer to Appendix 2 for details.
 - 257/258 CLIFTON AVENUE, KEMPS CREEK, NSW (16 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the 18 February 2025. Refer to Appendix 2 for details
 - 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW (15 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the same day. Refer to Appendix 2 for details
 - 949-965 MAMRE ROAD, KEMPS CREEK, NSW (15 db (A) above NML). No attempt to contact was made due to resident being terminally ill and all communication with the family is being coordinated by the Community Commissioner and in consultation with Sydney Water.
 - 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW (14 db (A) above NML). Contacted for seventh round on the 17 February 2025. Provided consent on the same day. Refer to Appendix 2 for details.

g) demonstrate, where the OOHW is predicted to go on longer than 28 calendar days, that the licensee has consulted the community in relation to re-engagement periods for the purpose of determining agreement from the community is maintained and continuing.

- The project seeks to continue to consult and receive an agreement every 3 months instead of 28 days. The receivers were consulted regarding the 3 month timeframe and did not have any objection. The residents will raise any issues as they arise to John Holland's Community Manager.

Condition E1.3

The licensee must report to the EPA the community consultation and agreement process that was undertaken with the Community Affected Catchments. This report to the EPA must be:

a) prepared in writing;

- This document

b) detail the steps taken to fulfil the requirements of condition E1.2;

- A noise model was completed to identify the impacts of the works to the nearest residents. The project contacted the residents and provided information and details on the works planned (refer to script in Appendix 2). Residents provided consent for the works to go ahead and the project will update the residents if there are any changes to the planned works.

c) demonstrate that the Noise Sensitive Receivers understood the nature of the works and any predicted impacts, including that consideration was made of additional requirements relevant to the needs of culturally and linguistically diverse Noise Sensitive Receivers;

- The project team has a pre-existing relationship with all of the sensitive receivers and there was no requirement for translating and interpreting services to support the conversation about the proposed works for 8 of the residents. The 9th receiver (230-234 Clifton Avenue) is culturally and linguistically diverse; the team uses text message to communicate as he can use Google Translate.

d) provide the script used during the community consultation with Noise Sensitive Receivers;

- Full script included in Appendix 2.

e) report community response and consent rates (including where no contact could be made) against the total community affected catchments, and must be broken down into response and consent rates based on sub-catchments that are delineated by affectation levels;

- Included in Appendix 2. All impacted residents provided full consent except for one resident (257/258 Clifton Rd) who did not provide a response.

f) include a noise validation monitoring plan as required by E1.4; and

- Detailed below in Section E1.4.

g) be submitted to the EPA at least 15 business days prior to any works that are the subject of the agreement being undertaken unless prior arrangements have been made with the EPA

- Submitted on the 20 February 2025.

A copy of the report must be:

a) kept by the licensee for the duration of this licence including on the premises, and made available to an EPA authorised officer on request; and

- Acknowledged, a copy of this report will be kept at the premises and for the duration of EPL 21800. A copy of this report will be made available to an EPA authorised officer on request,

b) be made available on the licensee's project website or another website approved in writing by the EPA for the duration of the OOHWs permitted under condition E1.1. (Personal details of Noise Sensitive Receivers must be omitted).

- Acknowledged, a copy of this report (as approved in writing by the EPA) will be made available on John Holland's website for the duration of the OOHW permitted under condition E1.1.

Condition E1.4

Noise Validation Monitoring

A noise validation monitoring plan must be submitted to the EPA for approval as part of the community agreement documentation prior to any OOHW occurring.

- Noise validation monitoring will be done in accordance with the Noise and Vibration CEMP Sub-plan and the CNVIS.
- Noise validation monitoring of construction noise levels will be undertaken as follows:
 - Monitoring will be undertaken at the location which is used as part of noise prediction assessments and is consistent with the project's noise prediction tool, Gatewave or at a location that provides representative noise levels if there are access issues.
 - Monitoring will be carried out at the commencement of the activity. This will confirm that actual noise levels are consistent with noise impact predictions and that the management measures that have been implemented are appropriate;
 - Monitoring will be recorded over 15-minute sample intervals, excluding periods of extraneous noise until a representative sample has been obtained.
 - Monitoring will involve the minimum range of noise metrics, including the following A-weighted noise levels: LA90, LAeq, LA10, LA (min) and LA(max).
 - Noise measurements will be timed to ensure operation of the noisiest plant is captured.
 - Measurements will be recorded on a project-specific noise verification record form (Appendix A of the USC Noise & Vibration CEMP sub-plan)

Condition E1.5

Validation monitoring must be undertaken for any OOHW that are the approved under condition E1.1 and must:

a) be undertaken in accordance with the monitoring plan prepared under condition E1.4;

- Validation monitoring will be undertaken as stated in condition E1.4

b) be performed by a Competent Person;

- A member of the Upper South Creek Environment Team will be conducting the noise verification monitoring. All members of the team meet the definition of a *Competent Person* in the EPL 21800 Special Dictionary (E2.1).

c) be performed on at least the first 2 occasions (day, evening, nights) where OOHW will be undertaken and are likely to impact Noise Sensitive Receivers;

- Scenario 1: Noise monitoring will take place during the night time period (between 5am to 7am).
- Scenario 2: Noise monitoring will take place during the night time period (between 6am to 7am).
- Scenario 3: Noise monitoring will take place during the night time period (5am to 6am) and day OOH period (7am to 8am and between 1pm to 6pm).

d) be performed on any other occasion (day, evening, night) where the nature of the works is likely to cause greater noise impacts than the first 2 occasions;

- Not applicable for the nature of the works.

e) be representative of the impacts in terms of monitoring locations, time and duration of measurements; and

- Monitoring will take place at multiple locations around the site boundary and it will be conducted in 15-minute intervals. It will be done during the noisiest plant for each scenario. The project also has SiteHive noise monitors across the site and will be able to capture real-time data throughout the works.
- Verification at the loudest resident is not accessible for 146B Clifton Avenue. Thus, as discussed with the project Acoustic Advisor, verification monitoring will take place at the project boundary and calculation will be done to identify the noise levels at the resident.

f) be recorded and provided to an EPA officer upon request.

- Monitoring data will be recorded and can be provided to the EPA upon request.

Condition E1.6

If validation monitoring undertaken under Condition E1.5 shows that noise levels are higher than those predicted by any noise modelling undertaken as part of the community agreement, work practices must be modified immediately so that measured noise levels do not exceed predicted levels.

Where it has been determined that works cannot be modified to achieve the predicted noise levels:

a) the licensee must report immediately to the EPA; and

- Acknowledged, the project will report to the EPA if the noise levels are above predicted levels.

b) after considering the circumstances EPA may withdraw its permission under E1.1.

- Acknowledged, the project agrees with this condition.

Condition E1.7

Ongoing community engagement and agreement

a) For any approval of OOHW under E1.1 predicted to take longer than 28 calendar days to remain valid, the licensee must be able to demonstrate agreement from the community is maintained and continuing.

- The project seeks to continue to consult and receive an agreement every 3 months instead of 28 days. The receivers were consulted regarding the 3 month timeframe and did not have any objection. The residents will raise any issues as they arise to John Holland's Community Manager.

b) To demonstrate agreement from the community is maintained and continuing the licensee must:

i. engage the community to determine if a substantial majority of Noise Sensitive Receivers continue to consent to the OOHW pursuant to the re-engagement period determined under condition E1.2(d);

- The project will consult with the community every 3 months to ensure agreement is maintained and works can continue.

ii. provide the EPA with a report within 7 calendar days of the end of each re-engagement period summarising the community response including ongoing consent rates of the Noise Sensitive Receiver; and

- The project will provide the EPA with a report following re-engagement with the community and will include ongoing consent rates.

c) Where the licensee is unable to demonstrate a substantial majority of agreement from Community Affected Catchment is maintained and continuing:

i. the licensee must report immediately to the EPA; and

- The project will report to the EPA if applicable.

ii. after considering the circumstances EPA may withdraw its permission under E1.1.

- Noted and acknowledged.

Conclusion

John Holland seeks the EPA's approval to continue undertaking Out of Hours Work and all impacted sensitive receivers have provided their consent except for one receiver in 949-965 Mamre Road (the resident is terminally ill).

Appendix 1 – OOHW Permit (Draft)




| A. General Details | | | |
|--|---|----------------|-----------------------------|
| Contract: | Upper South Creek (USC) Project | | |
| Contractor: | John Holland Pty. Ltd. | | |
| Application Title: | AWRC Extended Hours Community Agreement | | |
| Application Number: | A0028 | | |
| Application Date: | 20/02/2025 | | |
| Relevant Planning Approval: | SSI 8609189 | | |
| Environmental Protection Licence (EPL): | 21800 | | |
| Contact Details | | | |
| Position | Name | Contact Number | Email |
| Construction Manager | Jeremy Cadzow | 0409 654 791 | Jeremy.Cadzow@jhg.com.au |
| Communications Representative | Sheila Maidment | 0459 885 912 | Sheila.Maidment@jhg.com.au |
| Environmental Manager / Representative | Alyce Harrington | 0409 633 908 | Alyce.Harrington@jhg.com.au |

| B. Details of Proposed Scope of Works | |
|---|--|
| Proposed Works: <ul style="list-style-type: none"> • Work methodologies. • List of plant / equipment to be used (worst case scenario). | <p>The works are planned to take place within the AWRC site (NCA T1). The project plans to conduct concrete pours and general construction in accordance with the timing below:</p> <ul style="list-style-type: none"> • Concrete Pour (5am – 7am; Monday to Friday) • General Construction (6am – 7am Monday to Friday and 1pm – 6pm Saturday) <p>The plant and equipment which will be used is detailed in the noise assessment.</p> <p>Commencement of these works is subject to approval by NSW EPA.</p> |
| Justification for OOHW | Community Agreement in accordance with EPL Condition E1 |
| Proposed Timings | <p>Works outside standard construction hours will be undertaken during the following Out of Hours (OOH) periods:</p> <ul style="list-style-type: none"> • OOH Period 1 (6 pm- 10pm) • OOH Period 2 (10 pm – 7am) |
| Worst-case number of consecutive occasions affecting the same receiver: | 9 |
| Acoustic Assessment attached? <input checked="" type="checkbox"/> Yes (Refer to Appendix 3) <input type="checkbox"/> No | |


| C. Assessed Noise and Vibration Impacts and Applicable Mitigation Measures | | |
|--|--------------------------------|---|
| Refer to Appendix 3 for quantitative Noise and Vibration Impact Assessment for the works. | | |
| Mitigation Measures | | |
| Noise / Vibration Mitigation Measure | Reasonable / Feasible (Y/N/NA) | Comments |
| Have you considered programming of noisy activities to reduce community impacts? | N/A | Where possible, noisy works such as saw cutting will be prioritised to be completed during the day period. |
| Are there alternative plant or methods that can be used to reduce noise? | N/A | No alternative plant or methods are proposed. The nature of open trenching works allows the workfront to progress and ensure nearby receivers are not exposed to noise for multiple nights. |
| Noise barriers/mats to assist noise management for all noisy works where practical | N/A | Noise barriers will be in place during activities such as saw cutting and rock breaking. |
| Where possible, trucks and vehicles to be parked up between noisy works when operating near sensitive receivers. | Y | This will be implemented where reasonable and feasible. |
| All plant and equipment to minimise reversing where possible and must include the use of non-tonal reversing beepers (or an equivalent mechanism, e.g. 'quackers') | Yes | All mobile plant and equipment on site will have non-tonal reversing alarms equipped. |
| Staff to be briefed before works - no loud talking, excessive use of radios, music, swearing, be mindful of the community. Turn off equipment when not in use. Do not drop tools, equipment, and materials | Yes | Included in inductions and pre-starts. |
| Supervisors will make note of, and have removed off site and replaced any equipment item observed to have defective noise controls e.g. defective muffler, loose or missing cowling or engine compartment panels etc | Yes | Defective plant and equipment will be identified during plant inductions and during site inspections. Any defective plant/equipment will be removed and/or replaced. |
| During high noise impact works 3 hours on 1 hour off must be enforced unless the high noise activity is to be completed before midnight. | Yes | High noise impact work will be prioritised to be completed during the day period wherever possible. Where high noise impact works are carried out after 12am these will continue with 3 hours on and 1 hour off. |
| Can temporary relocation (eg. accommodation) be offered to the adjacent sensitive receivers? | N/A | Alternative accommodation is not proposed as part of this community agreement. |
| Is minimum distance for cosmetic damage or human comfort triggered | N/A | No vibratory works will be carried out within the minimum working distance. |
| Are there any additional measures that could be incorporated to further mitigate any noise impacts? | Y | <ul style="list-style-type: none"> All workers are to have completed the project induction and attended the pre-start toolbox. Pre-start toolbox is to include the requirement for workers to leave the site in a quiet and considerate manner after the completion of works, being mindful of the site's neighbours. Workers to communicate through walkie talkies when communicating over large distances (no shouting). Flood lights will be directed down to prevent light spill. Reversing alarms to be non-tonal only. Plant not in use to be switched off. Residential grade mufflers will be fitted. Air brake silencers will be installed and operational. No signalling by horns. No whistles to be used. No shouting. |

| | | <ul style="list-style-type: none"> No radios. No dropping of materials from height, throwing of metal items and slamming of doors. No excessive revving of plant and vehicle engines. |
|-------------------------------------|------------------------------|---|
| Additional Mitigation Measures | Reasonable/Feasible (Y/N/NA) | Comments |
| Notification (N) | Y | <ul style="list-style-type: none"> A Gatewave noise model has been developed which models the activity occurring in the work area. The model identified residents to be impacted. The residents were consulted and notified prior to works taking place. Consent from the residences are noted in this community agreement. |
| Specific Notification (SN) | Y | <ul style="list-style-type: none"> A specific community consultation script regarding the works was delivered to each of the identified receivers as part of the community agreement process. |
| Individual Briefing (IB) | Y | <ul style="list-style-type: none"> A specific community consultation script regarding the works was delivered to each of the identified receivers as part of the community agreement process. |
| Alternative Accommodation (AA) | N | <ul style="list-style-type: none"> Alternative accommodation has not been considered as part of the community agreement. |
| Verification of predicted noise (V) | Y | <ul style="list-style-type: none"> Attended verification noise monitoring will be carried out at the nearest residential receiver during the start of the works (the closest available location). |
| Phone Call (PC) | Y | <ul style="list-style-type: none"> A specific community consultation script regarding the works was delivered to each of the identified receivers as part of the community agreement process. |
| Project Specific Respite Offer (RO) | N | <ul style="list-style-type: none"> Works will continue for 5 consecutive nights in accordance with the community agreement. Respite will be provided on Saturdays and Sundays until completion of the works. High noise activities will be completed during the day period wherever possible. |
| Duration Respite (DR) | N | <ul style="list-style-type: none"> The works proposed to be completed in accordance with the community agreement will allow the scope of work on Park Road to be completed within a shorter timeframe. |

| D. Approval Status | |
|--|--|
| <input checked="" type="checkbox"/> OOHW Approved / Endorsed <input type="checkbox"/> OOHW Approved with conditions (see below) <input type="checkbox"/> OOHW Rejected | |
| Conditions for Approval: <div style="border: 1px solid black; height: 150px; width: 100%;"></div> | |

| Assessment of Risk Factors: <input checked="" type="checkbox"/> Low <input type="checkbox"/> Medium <input type="checkbox"/> High | | | |
|---|------------------|--|------------|
| Position | Name | Signature | Date |
| Environmental Manager | Alyce Harrington |  | 20/02/2025 |
| Community Manager | Sheila Maidment |  | 20/02/2025 |
| Construction Manager | Jeremy Cadzow |  | 20/02/2025 |

Appendix 2 – Community Consultation Record



17 February 2025

Upper South Creek Advanced Water Recycling Centre – extended working hours AWRC 3-month consultation

The hours proposed are as detailed in the table below:

| | | | |
|------------|------------------|-------------------------|----------------------|
| Scenario 1 | Monday to Friday | 5am – 7am | Concrete Pour |
| Scenario 2 | Monday to Friday | 6am – 7am | General Construction |
| Scenario 3 | Saturday | 6am - 8am and 1pm – 5pm | General Construction |

Benefits:

- Reduce traffic on Clifton Avenue and Elizabeth drive by spacing out deliveries and arrival of team to site
- Reduce risk of poor quality concrete and rework by ensuring deliveries arrive to site on time



Consultation record

| SCENARIO 1 | | |
|---|--|----------------------|
| Address | Name | Noise description |
| 146B CLIFTON AVENUE, KEMPS CREEK, NSW (2 db (A) above NML) | Justin Railton 0404 155 617 17/02 3.19 pm phonecall: “Everything is fine.” | Moderately intrusive |
| 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW (2 db (A) above NML) | Jim Vella 0419 252 746 17/02 3.00 pm Jim called back: “Nothing to raise, we’re fine.” 17/02 2.37 pm left voicemail. | Moderately intrusive |
| 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW (3 db (A) above NML) | Lily Bugeja 0400 207 180 17/2 2.38 pm phonecall: “We’ve noticed it’s been quieter. It’s still not worrying us.” | Moderately intrusive |
| SCENARIO 2 and 3 | | |



| | | |
|--|--|----------------------|
| 146B CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML) | Justin Railton 0404 155 617 17/02 3.19 pm phonecall: “Everything is fine.” | Moderately intrusive |
| 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW (19 db (A) above NML) | Jim Vella 0419 252 746 17/02 3.00 pm Jim called back: “Nothing to raise, we’re fine.” 17/02 2.37 pm left voicemail. | Moderately intrusive |
| 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW (14 db (A) above NML) | Rob Blacker 0428 483 856 17/02 3.27 pm Rob called back: “Yes, everything is fine.” 17/02 3.15 pm “Hi Rob, we are doing a round of weed spraying over the next | Moderately intrusive |

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 **Media (24/7)** 8849 5151 [sydneywater.com.au](https://www.sydneywater.com.au)



| | | |
|--|---|----------------------|
| | <p>month and have the Mirvac property to do. Kym from Mirvac asked that we liaise with you for access. Are you happy for us to come in via Reserve Rd gate? Would you like to know which day?</p> <p>And also, I'm doing my 3-monthly checkup about noise at the AWRC - any feedback for me about the extended hours?</p> <p>Thanks Sheila”</p> | |
| 949-965 MAMRE ROAD, KEMPS CREEK, NSW (15 db (A) above NML) | <p>Angelo and Melina Rinaldi</p> <p>0414 603 515 (Melina)</p> <p><i>Angelo is terminally ill and all communication with this family is being coordinated by the Community Commissioner.</i></p> | Moderately intrusive |
| 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW (15 db (A) above NML) | <p>James Ly</p> <p>0419 935 444</p> <p>17/02 2.50pm phonecall:</p> | Moderately intrusive |

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 **Media (24/7)** 8849 5151 sydneywater.com.au



| | | |
|--|---|----------------------|
| | "Yes we're good." | |
| <p>257 CLIFTON AVENUE, KEMPS CREEK, NSW (16 db (A) above NML)</p> <p>And</p> <p>258 CLIFTON AVENUE, KEMPS CREEK, NSW (15 db (A) above NML)</p> | <p>Kim Ngov and Mangden Ros</p> <p>0412 172 404 (Kim)</p> <p>18/02 6.57 pm SMS from Kim:</p> <p>"No feedback"</p> <p>18/02 10.48 am SMS</p> <p>"Hello Kim I'm doing my three- monthly checkin with Clifton Avenue residents about the extended work hours at Sydney Water's AWRC. Do you have any feedback for me?</p> <p>Kindest regards Sheila, John Holland"</p> <p>17/02 2.49pm left voicemail.</p> | Moderately intrusive |
| 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | <p>Lily Bugeja</p> <p>0400 207 180</p> <p>17/02 2.38 pm phonecall:</p> | Moderately intrusive |

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 **Media (24/7)** 8849 5151 [sydneywater.com.au](https://www.sydneywater.com.au)



| | | |
|---|---|-----------------------------|
| | <p>"We've noticed it's been quieter. It's still not worrying us."</p> | |
| <p>230-234 CLIFTON AVENUE, KEMPS CREEK, NSW</p> | <p>Dan (tenant)</p> <p>CALD – texted so they can use Google Translate.</p> <p>17/02 3.11 pm</p> <p>"The noise you make while working is not very loud and has no impact on us. Thank you for your greetings."</p> <p>17/02 2.58pm</p> <p>Hello Dan</p> <p>I'm doing my three-monthly check with Clifton Avenue residents.</p> <p>Are you ok with the Sydney Water construction noise next door?</p> <p>Is there anything you would like to talk to me about?</p> | <p>Moderately intrusive</p> |

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 **Media (24/7)** 8849 5151 sydneywater.com.au



| | | |
|--|-----------------------------------|--|
| | Thank you Sheila, John Holland | |
|--|-----------------------------------|--|



Appendix 3 – Gatewave Noise Model

Concrete Pour

From: Renzo Tonin and Associates via Gatewave

Calculation scenario: **Extended Construction Hours AWRC - Concrete Pour 5am** (Gatewave ID TM588_150)

Upper South Creek – Noise and Vibration Assessment Report

1 Introduction

The Renzo Tonin and Associates web-based construction assessment tool (Gatewave) has been used to prepare this noise and vibration assessment report for John Holland and the Upper South Creek Advanced Water Recycling Centre project (the Project).

The overall noise and vibration impacts from the Project works and associated mitigation measures (e.g. hoardings) have already been addressed in previous Construction Noise and Vibration Impact Statements (CNVIS) in accordance with CoA E48. This tool allows specific work areas and activities to be assessed as construction works progress. It also allows cumulative noise impact from other aspects of the Project or, where relevant noise from other construction projects, to be assessed and managed in accordance with the Construction Noise and Vibration Management Plan (USCP-JHG-MPL-ENV-0007, the 'CNVMP').

2 Assessment methodology

2.1 Construction noise

Results for the assessment of airborne noise were determined using a CadnaA computer noise model developed for the Project. The CadnaA noise model incorporates ground elevation contours, building heights, the built environment and atmospheric conditions to predict construction noise in accordance with the International Standard ISO 9613-2:1996 implementing quality standard ISO 17534-1:2015.

Results from the CadnaA noise model are exported and stored into the Gatewave database which allows for the prediction of the total cumulative noise from all construction activities.

A summary of the noise calculation parameters is detailed in Table 1.

Table 1: Summary of noise modelling parameters

| Parameters | Inputs |
|---|---|
| Calculation method | ISO 9613-2:1996 implementing quality standard ISO 17534-1:2015 |
| Location of noise sources above the local ground | 1.5m |
| Height of receivers | 1.5m above ground level to represent 1.5m above ground floor level Additional 3m height for every additional floor assessed (i.e. 4.5m above ground for first floor, 7.5m for second floor etc.) |
| Sound Power Levels (L_w) of plant and equipment | All L_w data obtained from Renzo Tonin & Associates database Detailed in Section 3 |
| Construction activities | Detailed in Section 3 |
| Ground absorption | Varying from 1 for absorptive surfaces (e.g. park land), 0.5 (e.g. residential areas) to 0 for reflective surfaces (e.g. water, concrete, paving); |
| Noise barriers and screening | As detailed in Project CNVIS |

2.2 Construction vibration

The plant and equipment considered in this scenario are not considered vibration intensive. As a result, minimum working distances (MWDs) for cosmetic damage or human annoyance have not been nominated.

3 Construction activities, work areas and NCAs

3.1 Justification to complete the works OOH

EPL Section 8 Special Condition. E1 Community Agreement

3.2 Construction activities

3.2.1 Plant and equipment use

A summary of the plant and equipment operating during each assessment time period is presented in Table 2. Note that Table 2 identifies if a plant/equipment item is used for part or all of the assessment period on a given day, and does not necessarily denote if the plant/equipment are operating concurrently (refer APPENDIX A for details on which plant/equipment are operating together).

Table 2: Proposed construction activities and associated sound power levels


| Activity/plant/equipment | Number in use | | | | Sound power level, dB(A) | | High impact item | Noise reduction from mitigation measures, dB(A) |
|--|---------------|-----------|---------|-------|--------------------------|------|------------------|---|
| | Day | Day (OOH) | Evening | Night | Leq | Lmax | | |
| Extended Construction Hours AWRC -Concrete Pour 5am start | | | | | | | | |
| Concrete Agi | - | 1 | - | 1 | 108 | 111 | - | - |
| Concrete pump | - | 1 | - | 1 | 103 | 107 | - | - |
| Concrete vibrator | - | 2 | - | 2 | 100 | 100 | - | - |
| Light vehicles | - | - | - | 2 | 82 | 100 | - | - |

Notes:

- 1) Refer APPENDIX A for plant/equipment timings and to identify which items operate concurrently.
- 2) Equipment marked in **orange** are not verified by Renzo Tonin and Associates

The locations of the construction activities are presented in Figure 1.

Figure 1: Construction work areas

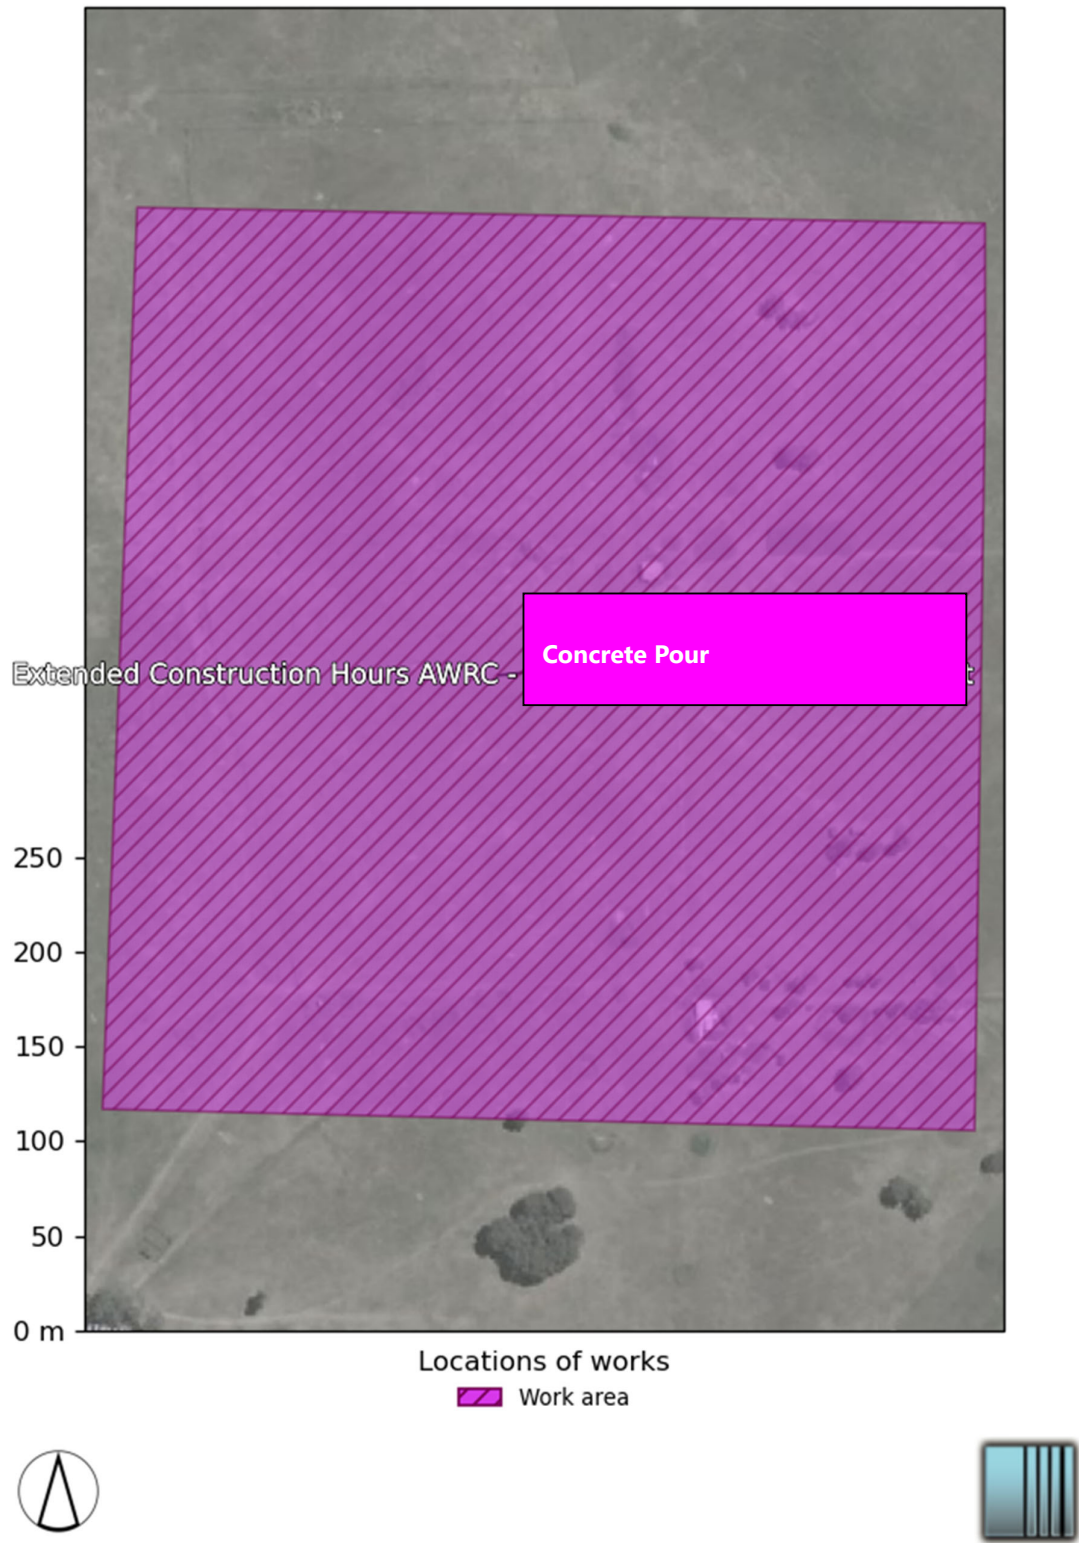

4 Construction noise and vibration impacts

4.1 Predicted noise levels

4.1.1 Construction $L_{Aeq,15min}$ assessment

Noise levels were determined by modelling the noise sources, receiver locations, and operating activities, based on the information presented in Table 2.

The noise predictions presented in this report represent a realistic worst-case scenario when construction occurs at the closest location within a specific work area. At each receiver, noise levels will vary during the construction period based on the position of equipment within the work area, the distance to the receiver, the construction activities being undertaken and the noise levels of particular plant items and equipment. Actual noise levels will often be less than the predicted levels presented.

A summary of the results is presented in Table 3. NMLs and predictions for the three worst-affected receivers for each works area are provided in Table 4. Detailed noise results including additional mitigation measures are provided in APPENDIX B and presented visually in noise maps in APPENDIX C.

Table 3: Summary of receivers above relevant NMLs

| NCA | Day | | Day (OOH) | | Evening | | Night | |
|------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|
| | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties |
| NCA T1 | 0 to 10 | | 0 to 5 | 0 | 0 to 5 | | 0 to 5 | 3 |
| | > 10 | | 6 to 15 | 0 | 6 to 15 | | 6 to 15 | 0 |
| | Over 75 dB(A) | | 16 to 25 | 0 | 16 to 25 | | 16 to 25 | 0 |
| | | | > 25 | 0 | > 25 | | > 25 | 0 |
| Industrial | 0 to 10 | | 0 to 5 | 0 | 0 to 5 | | 0 to 5 | 0 |
| | > 10 | | 6 to 15 | 0 | 6 to 15 | | 6 to 15 | 0 |
| | Over 75 dB(A) | | 16 to 25 | 0 | 16 to 25 | | 16 to 25 | 0 |
| | | | > 25 | 0 | > 25 | | > 25 | 0 |

4.2 Predicted vibration levels

The plant and equipment described in Table 2 are not considered vibration intensive and, as a result, do not have MWDs for cosmetic damage or human annoyance.

4.3 Mitigation measures

4.3.1 Specific reasonable and feasible mitigation measures

- Site inductions will be carried out for all personnel to include potential impacts to sensitive receivers and worker behaviours. At the start of each shift a briefing regarding noise will be included as part of the pre-start to inform all personnel of the noise sensitivities of the area and works.
- Verification monitoring to be carried out at the start of out of hours works for each location to confirm predicted noise levels.
- Noise source observations to be carried out by the Environment Team at the start of the works with any additional mitigation measures or observations to be implemented.
- All equipment to be fitted with non-tonal reversing alarms.
- No swearing or unnecessary shouting or loud stereos/radios/phone calls on speaker on-site.
- No dropping of materials from height, throwing of metal items and slamming of doors
- Light vehicles and plants to be switched off when not in use.

4.3.2 Additional noise mitigation measures

In accordance with the CNVG, where, after application of all reasonable and feasible mitigation measures, the $L_{Aeq(15\text{minute})}$ airborne construction noise levels are still predicted to exceed the NMLs, additional airborne noise mitigation measures can be applied to further limit the risk of annoyance from construction noise.

Figure 2 presents a summary of the additional noise mitigation measures applicable for construction activities where, after application of all reasonable and feasible mitigation options, construction noise levels still exceed the NMLs.

Figure 2: Additional airborne noise mitigation measures

| When is the work being undertaken? | How much does the predicted noise level exceed the ANML by? | Identify additional management measures to be implemented | Additional mitigation measure code |
|--|---|---|------------------------------------|
| All Hours | 75 dB(A) or greater | V, N, PC, RO | AM2 |
| Standard Hours M-F 7am to 6pm Sat 8am to 6pm | 0 dB(A) | - | - |
| | ≤ 10 dB(A) | - | - |
| | 10 to 20 dB(A) | V, N | AM1 |
| | > 20 dB(A) | V, N | AM1 |
| OOHW Period 1 M-F 6pm to 10pm Sat 6pm to 10pm Sun/ PH 8am to 10pm | < 5 dB(A) | - | - |
| | 5 to 15 dB(A) | N, R1, DR | AM3 |
| | 15 to 25 dB(A) | V, N, R1, DR | AM4 |
| | > 25 dB(A) | V, N, SN, IB, PC, R1, DR | AM5 |
| OOHW Period 2* M-F 10pm to 7am Sat 10pm to 8am Sun/ PH 6pm to 8am | < 5 dB(A) | N | AM6 |
| | 5 to 15 dB(A) | V, N, R2, DR | AM7 |
| | 15 to 25 dB(A) | V, N, SN, IB, PC, R2, DR | AM8 |
| | > 25 dB(A) | AA, V, N, SN, IB, PC, R2, DR | AM9 |

Notes: Use the abbreviation codes in the table above to confirm management measures required

* Where OOHW occur in the evening/night shoulder period (10pm to 12am) or the night/morning shoulder period (5am to 7am) apply additional airborne mitigation measures from the OOHW Period 2, excluding AA.

N = Notification (should be issued a minimum of five working days prior to the start of works)

SN = Specific notifications (issued no later than seven calendar days ahead of construction activities)

IB = Individual briefing PC = Phone Call

AA = Alternative accommodation** RQ = Project specific respite offer R1 = Respite period 1

V = Verification of predicted noise DR = Duration respite R2 = Respite period 2

** Where construction activity impacts receiver for more than two consecutive nights. AA is not applicable to shoulder periods.

4.3.3 Noise monitoring plan

Attended noise monitoring is to be undertaken to verify that noise levels resulting from works are in accordance with the levels predicted in this noise and vibration assessment report, subject to obtaining the property owner/occupier's consent to access the property (where required). Noise monitoring should be carried out on or near the property boundary at a location representative of the worst affected location (i.e. in publicly accessible areas on or near the nominated receivers, typically at ground level).

Table 4 identifies potential monitoring locations in each NCA, which are the three worst noise-affected receivers for each NCA from the works.

Note: Gatewave tries to find the most affected receivers in each NCA (up to 3 locations) purely based on the numerical results. These locations will be reviewed for suitability based on safety, accessibility, will provide valid data, etc. If not suitable, alternative suitable locations will be selected for verification monitoring.

If monitoring levels exceed predicted levels, continual improvement and corrective action measures will be implemented, (e.g. investigate cause, review work or activity, scheduling, etc).

Table 4: Nominated verification monitoring locations

| Receiver | | | Noise management levels (NMLs), dB(A) | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | Predicted noise levels, dB(A) Lmax |
|----------|--|-------------|---------------------------------------|---------------|-------------|-----------|--------------------------------|--------------|---|-----------|---------|-------|------------------------------------|
| NCA | Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night |
| NCA T1 | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 39 | - | 39 | 42 |
| NCA T1 | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 38 | - | 38 | 41 |
| NCA T1 | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 38 | - | 38 | 41 |

4.3.4 Vibration monitoring

As the plant and equipment in this scenario are not considered to be vibration intensive, further vibration monitoring is not required.

If attended vibration monitoring is required (for example, in response to vibration-related complaints), monitoring will be undertaken according to the process described in the CNVMP.

Vibration monitoring should follow the procedures outlined in Appendix F of the CNVG.

Important disclaimer

- * This document has been partly automatically generated by Gatewave™, software for prediction, assessment and management of noise and vibration, developed by Renzo Tonin and Associates.
- * This document is uncontrolled. Please contact Renzo Tonin and Associates if you suspect there are any errors in this report.
- * Results in this report are based on the assumptions described in Section 0 and inputs presented in Section 3. Noise and vibration monitoring data will be collected to ensure Gatewave is verified and adjusted, if required.
- * Renzo Tonin and Associates cannot be held liable for the misuse of the software Gatewave™, including any errors that may be contained within the software.

APPENDIX A Summary of works

A.1 Plant and equipment

Table 5: Plant and equipment schedule for work area: **Extended Construction Hours AWRC – Concrete Pour 5am start**

| Equipment | Penalty, dB(A) | Quantity | Intensity | Reduction, dB | Sound power level, dB(A) | | Start time | End time |
|--|----------------|----------|-----------|---------------|--------------------------|------------------|---------------------------|---------------------------|
| | | | | | L _{eq,15min} | L _{max} | | |
| Extended Construction Hours AWRC – Concrete Pour 5am start | | | | | | | | |
| Concrete Agi | - | 1 | 100% | 0 | 108 | 111 | Monday to Friday 05:00:00 | Monday to Friday 07:00:00 |
| Concrete pump | - | 1 | 100% | 0 | 103 | 107 | Monday to Friday 05:00:00 | Monday to Friday 07:00:00 |
| Concrete vibrator | - | 2 | 100% | 0 | 100 | 100 | Monday to Friday 05:00:00 | Monday to Friday 07:00:00 |
| Light vehicles | - | 2 | 10% | 0 | 82 | 100 | Monday to Friday 05:00:00 | Monday to Friday 07:00:00 |

APPENDIX B Detailed construction noise results

Table 6: Construction noise results


| Receiver | | Noise management levels (NMLs), dB(A) | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | Predicted noise levels, dB(A) Lmax | | Additional mitigation | | | | |
|----------|--|--|--------------|---------|---------------|--------------------------------|-----------|---|--------------|-----|-----------|------------------------------------|-------|-----------------------|-----|-----------|---------|-------|
| | | Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night | Day | Day (OOH) | Evening | Night |
| | | 885A MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 98 | - | 98 | 101 | - | - | - | - |
| | | 885A MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 95 | - | 95 | 98 | - | - | - | - |
| | | 885A MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 94 | - | 94 | 97 | - | - | - | - |
| | | 885A MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 94 | - | 94 | 97 | - | - | - | - |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 42 | - | 42 | 46 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 41 | - | 41 | 44 | - | - | - | - |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 41 | - | 41 | 44 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 40 | - | 40 | 42 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 39 | - | 39 | 42 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 39 | - | 39 | 42 | - | - | - | - |
| | | 949A MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 39 | - | 39 | 42 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 39 | - | 39 | 42 | - | - | - | AM1 |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 42 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 38 | - | 38 | 41 | - | - | - | AM1 |
| | | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 38 | - | 38 | 41 | - | - | - | AM1 |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 41 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 38 | - | 38 | 40 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 37 | - | 37 | 40 | - | - | - | - |
| | | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 37 | - | 37 | 40 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 37 | - | 37 | 40 | - | - | - | - |
| | | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 37 | - | 37 | 40 | - | - | - | - |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 36 | - | 36 | 40 | - | - | - | - |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 36 | - | 36 | 39 | - | - | - | - |
| | | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 36 | - | 36 | 39 | - | - | - | - |
| | | 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 36 | - | 36 | 39 | - | - | - | - |
| | | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |
| | | 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 35 | - | 35 | 38 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |
| | | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |
| | | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |

| Receiver | Noise management levels (NMLs), dB(A) | | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | Predicted noise levels, dB(A) Lmax | | Additional mitigation | | | |
|----------|--|--------------|---------|---------------|-------------|--------------------------------|------------------|---|-----|-----------|---------|------------------------------------|-------|-----------------------|-----------|---------|-------|
| | Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night | Day | Day (OOH) | Evening | Night |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 35 | - | 35 | 38 | - | - | - | - |
| | 237-247 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 35 | - | 35 | 38 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 34 | - | 34 | 38 | - | - | - | - |
| | 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 34 | - | 34 | 37 | - | - | - | - |
| | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 949-965 MAMRE ROAD, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 34 | - | 34 | 37 | - | - | - | - |
| | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 34 | - | 34 | 37 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 258 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 34 | - | 34 | 37 | - | - | - | - |
| | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 34 | - | 34 | 37 | - | - | - | - |
| | 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 34 | - | 34 | 36 | - | - | - | - |
| | 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 34 | - | 34 | 36 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 917 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 931A MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 931A MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 33 | - | 33 | 36 | - | - | - | - |
| | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 33 | - | 33 | 36 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 32 | - | 32 | 35 | - | - | - | - |
| | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 32 | - | 32 | 35 | - | - | - | - |
| | 949-965 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 32 | - | 32 | 35 | - | - | - | - |
| | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 32 | - | 32 | 35 | - | - | - | - |
| | 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 32 | - | 32 | 35 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 31 | - | 31 | 34 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 31 | - | 31 | 34 | - | - | - | - |
| | 931A MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 31 | - | 31 | 34 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 31 | - | 31 | 34 | - | - | - | - |
| | 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 30 | - | 30 | 33 | - | - | - | - |
| | 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 30 | - | 30 | 33 | - | - | - | - |

| Receiver | | Noise management levels (NMLs), dB(A) | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | | | | | Predicted noise levels, dB(A) Lmax | Additional mitigation | | |
|--|--------------|---------------------------------------|---------------|-------------|-----------|--------------------------------|--------------|---|-----------|---------|-------|-------|-----|-----------|---------|------------------------------------|-----------------------|--|--|
| Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night | Day | Day (OOH) | Evening | Night | | | |
| 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 30 | - | 30 | 33 | - | - | - | - | | | |
| 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 30 | - | 30 | 33 | - | - | - | - | | | |
| 901 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 30 | - | 30 | 33 | - | - | - | - | | | |
| 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 29 | - | 29 | 32 | - | - | - | - | | | |
| 885-899 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 28 | - | 28 | 31 | - | - | - | - | | | |
| 258 CLIFTON AVENUE, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 28 | - | 28 | 31 | - | - | - | - | | | |
| 931 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 27 | - | 27 | 30 | - | - | - | - | | | |
| 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Industrial | 75 | 75 | 75 | 75 | None | None | - | 26 | - | 26 | 29 | - | - | - | - | | | |
| 1725A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 25 | - | 25 | 28 | - | - | - | - | | | |
| 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Non-receiver | 999 | 999 | 999 | 999 | None | None | - | 22 | - | 22 | 25 | - | - | - | - | | | |

APPENDIX C Noise level above nominated target


Noise level above NML Day (area 1 of 2)

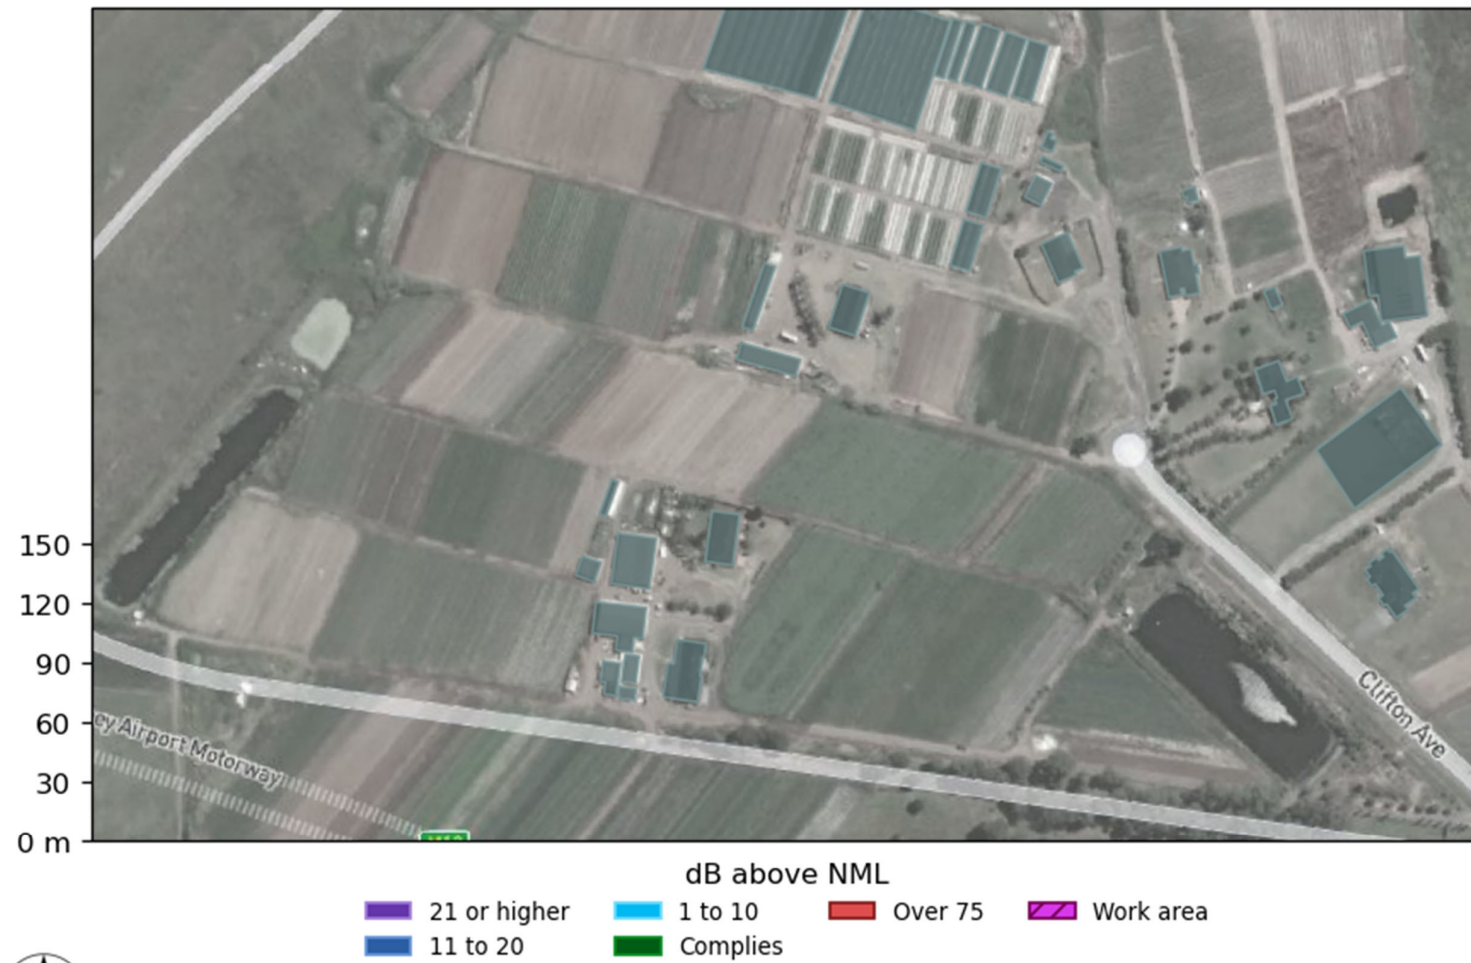

Noise level above NML Day (area 2 of 2)




Noise level above NML Day (OOH) (area 1 of 2)

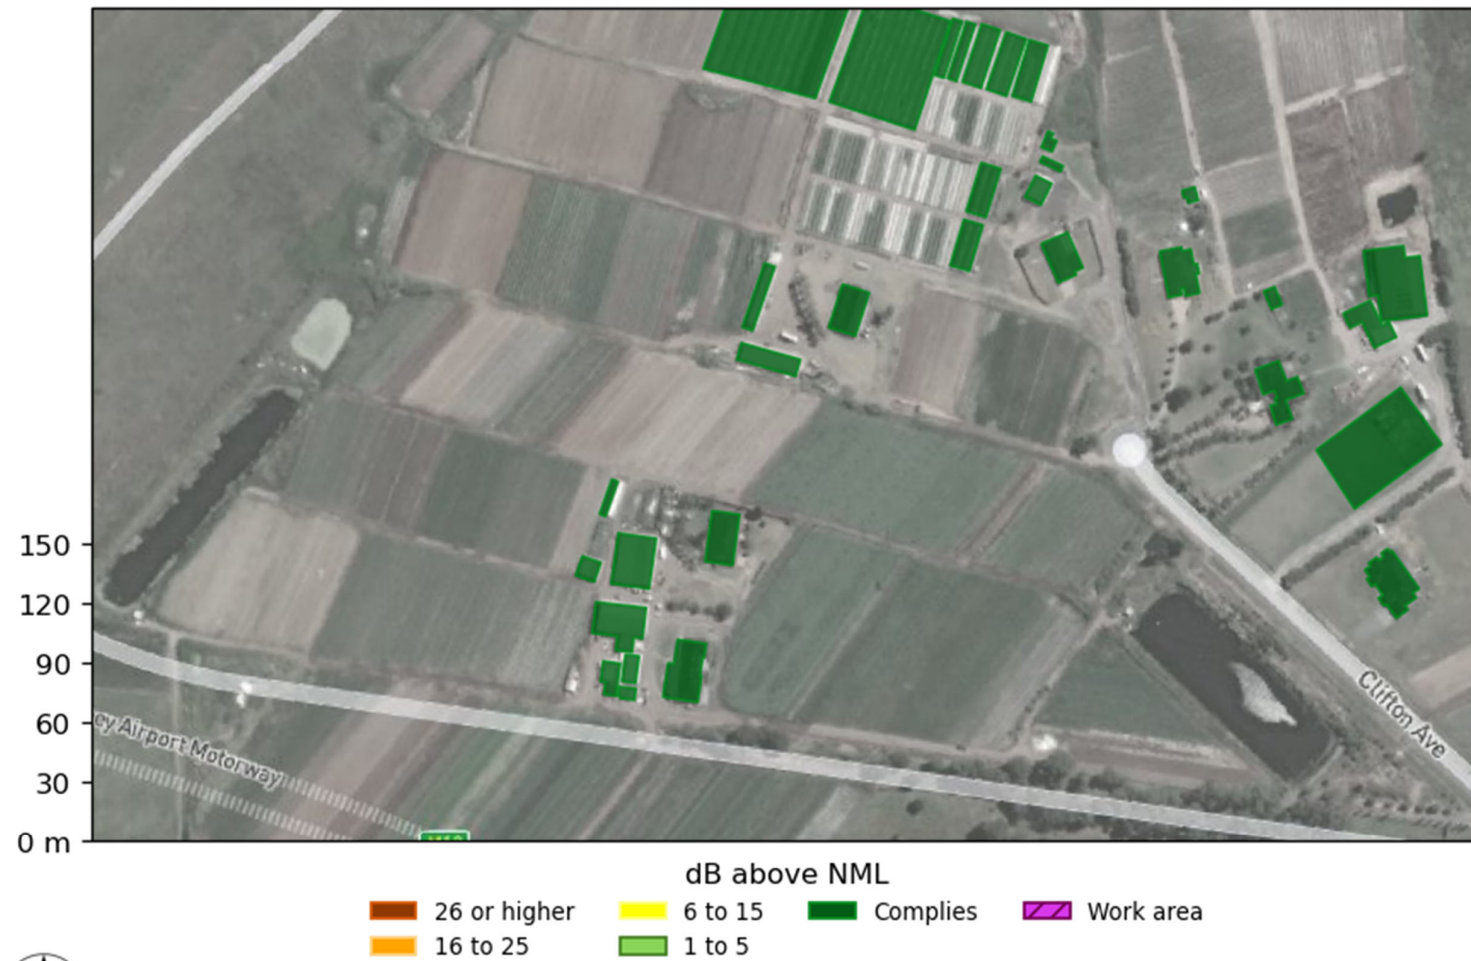

Noise level above NML Day (OOH) (area 2 of 2)




Noise level above NML Evening (area 1 of 2)

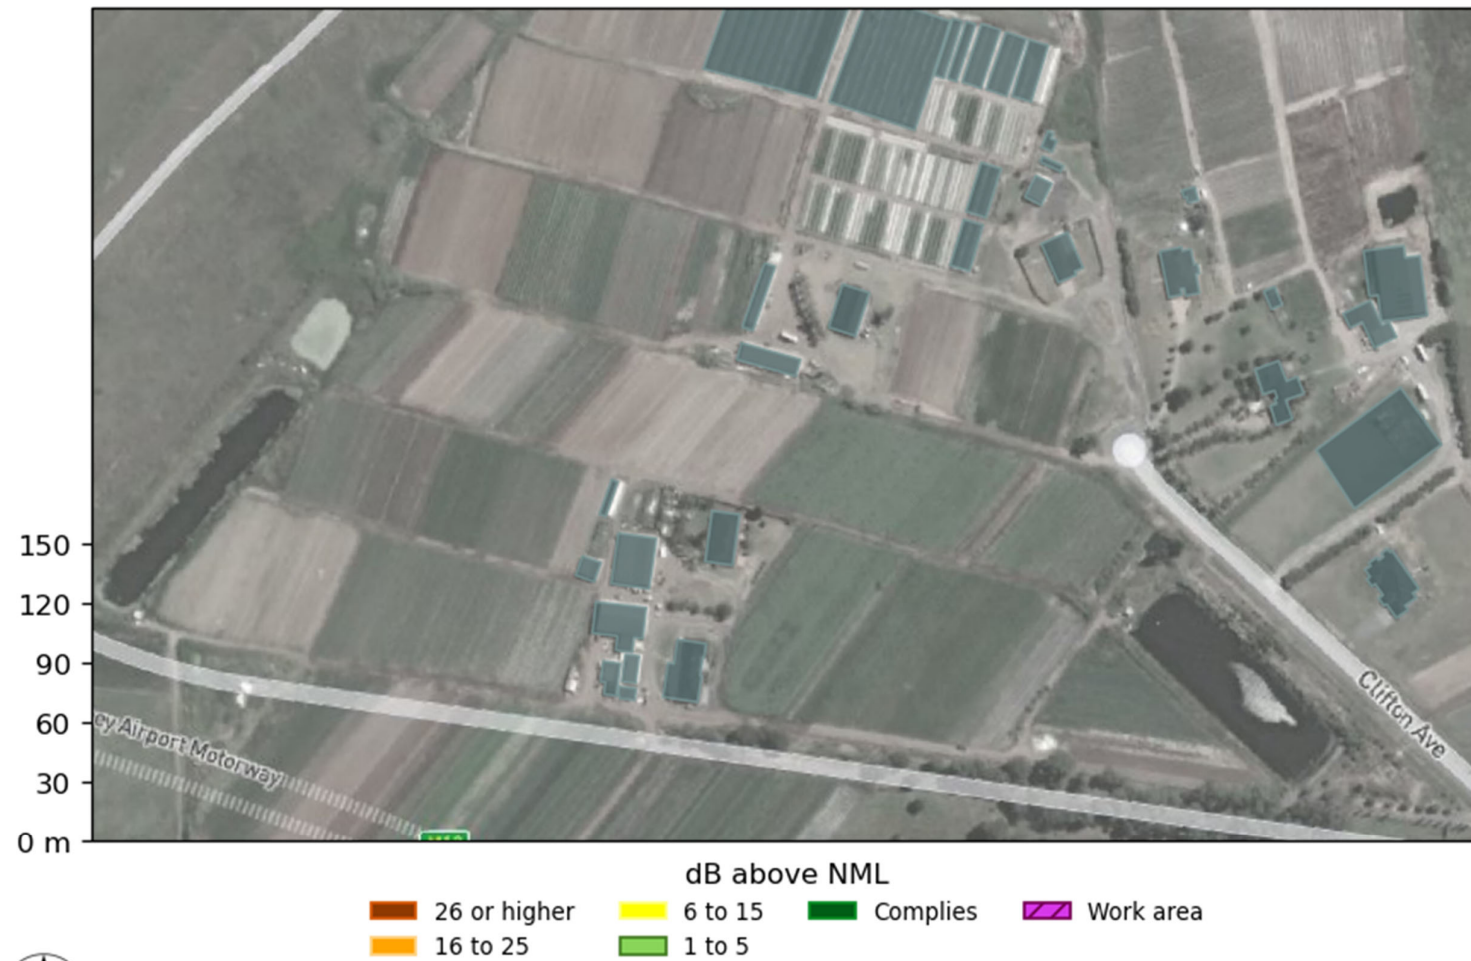

Noise level above NML Evening (area 2 of 2)



Noise level above NML Night (area 1 of 2)

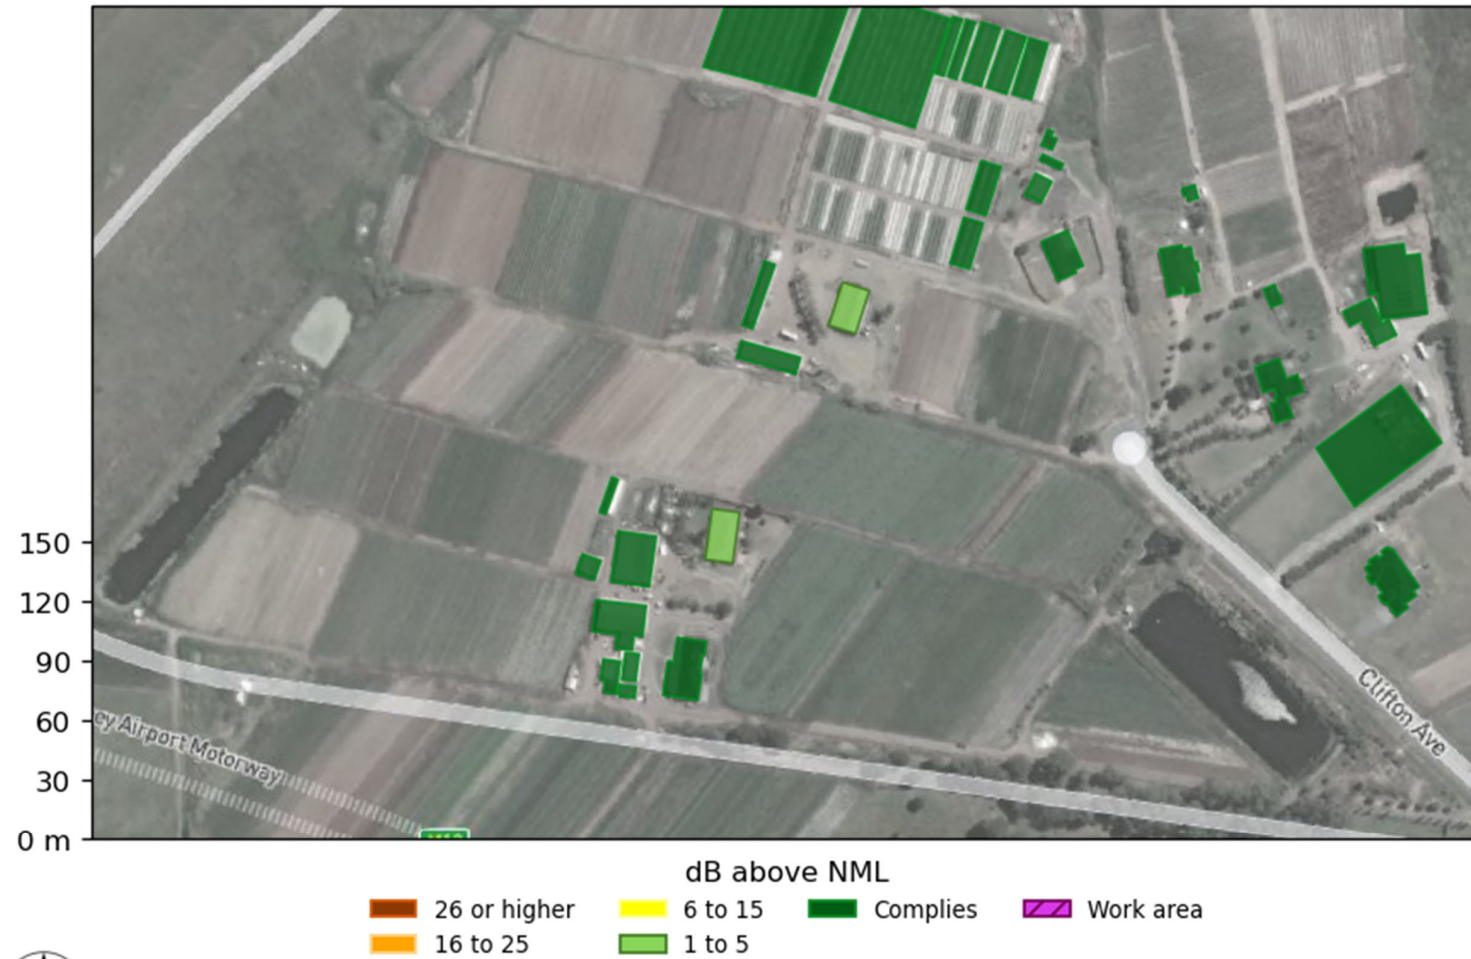

Noise level above NML Night (area 2 of 2)



Structure Construction (General Construction)

From: Renzo Tonin and Associates via Gatewave

Calculation scenario: **Extended Construction Hours AWRC - Structure Construction**

(Gatewave ID TM588_177)

Upper South Creek – Noise and Vibration Assessment Report

1 Introduction

The Renzo Tonin and Associates web-based construction assessment tool (Gatewave) has been used to prepare this noise and vibration assessment report for John Holland and the Upper South Creek Advanced Water Recycling Centre project (the Project).

The overall noise and vibration impacts from the Project works and associated mitigation measures (e.g. hoardings) have already been addressed in previous Construction Noise and Vibration Impact Statements (CNVIS) in accordance with CoA E48. This tool allows specific work areas and activities to be assessed as construction works progress. It also allows cumulative noise impact from other aspects of the Project or, where relevant noise from other construction projects, to be assessed and managed in accordance with the Construction Noise and Vibration Management Plan (USCP-JHG-MPL-ENV-0007, the 'CNVMP').

2 Assessment methodology

2.1 Construction noise

Results for the assessment of airborne noise were determined using a CadnaA computer noise model developed for the Project. The CadnaA noise model incorporates ground elevation contours, building heights, the built environment and atmospheric conditions to predict construction noise in accordance with the International Standard ISO 9613-2:1996 implementing quality standard ISO 17534-1:2015.

Results from the CadnaA noise model are exported and stored into the Gatewave database which allows for the prediction of the total cumulative noise from all construction activities.

A summary of the noise calculation parameters is detailed in Table 1.

Table 1: Summary of noise modelling parameters

| Parameters | Inputs |
|---|---|
| Calculation method | ISO 9613-2:1996 implementing quality standard ISO 17534-1:2015 |
| Location of noise sources above the local ground | 1.5m |
| Height of receivers | 1.5m above ground level to represent 1.5m above ground floor level Additional 3m height for every additional floor assessed (i.e. 4.5m above ground for first floor, 7.5m for second floor etc.) |
| Sound Power Levels (L_w) of plant and equipment | All L_w data obtained from Renzo Tonin & Associates database Detailed in Section 3 |
| Construction activities | Detailed in Section 3 |
| Ground absorption | Varying from 1 for absorptive surfaces (e.g. park land), 0.5 (e.g. residential areas) to 0 for reflective surfaces (e.g. water, concrete, paving); |
| Noise barriers and screening | As detailed in Project CNVIS |

2.2 Construction vibration

If there are any vibration intensive plant and equipment, the recommended minimum working distances (MWD) are presented in Table 4.

3 Construction activities, work areas and NCAs

3.1 Justification to complete the works OOH

EPL Section 8 Special Conditions. E1 Community Agreement

3.2 Construction activities

3.2.1 Plant and equipment use

A summary of the plant and equipment operating during each assessment time period is presented in Table 2. Note that Table 2 identifies if a plant/equipment item is used for part or all of the assessment period on a given day, and does not necessarily denote if the plant/equipment are operating concurrently (refer APPENDIX A for details on which plant/equipment are operating together).

Table 2: Proposed construction activities and associated sound power levels


| Activity/plant/equipment | Number in use | | | | Sound power level, dB(A) | | High impact item | Noise reduction from mitigation measures, dB(A) |
|----------------------------------|---------------|-----------|---------|-------|--------------------------|------|------------------|---|
| | Day | Day (OOH) | Evening | Night | Leq | Lmax | | |
| Extended Construction Hours | | | | | | | | |
| AWRC - Structure Construction | | | | | | | | |
| Concrete Agi | - | - | - | 50 | 125 | 111 | - | - |
| Mobile crane (20t-250t) | 2 | 2 | - | 2 | 100 | 108 | - | - |
| Piling Rig - vibratory | 1 | 1 | - | 1 | 121 | 119 | Yes | - |
| Concrete pump | 2 | 2 | - | 2 | 105 | 107 | - | - |
| Concrete vibrator | 4 | 4 | - | 4 | 103 | 100 | - | - |
| Light vehicles | 6 | 6 | - | 6 | 87 | 100 | - | - |
| Road truck (deliveries to site) | 8 | 8 | - | 8 | 105 | 111 | - | - |
| EWP | 4 | 4 | - | 4 | 95 | 98 | - | - |
| Telehandler / Franna crane (20t) | 2 | 2 | - | 2 | 99 | 103 | - | - |
| Generator | 2 | 2 | - | 2 | 97 | 95 | - | - |
| Handtool - rattle gun | 8 | 8 | - | 8 | 109 | 118 | - | - |
| Water cart | 2 | 2 | - | 2 | 101 | 107 | - | - |

Notes:

- 1) Refer APPENDIX A for plant/equipment timings and to identify which items operate concurrently.
- 2) Equipment marked in **orange** are not verified by Renzo Tonin and Associates

The locations of the construction activities are presented in Figure 1.

Figure 1: Construction work areas

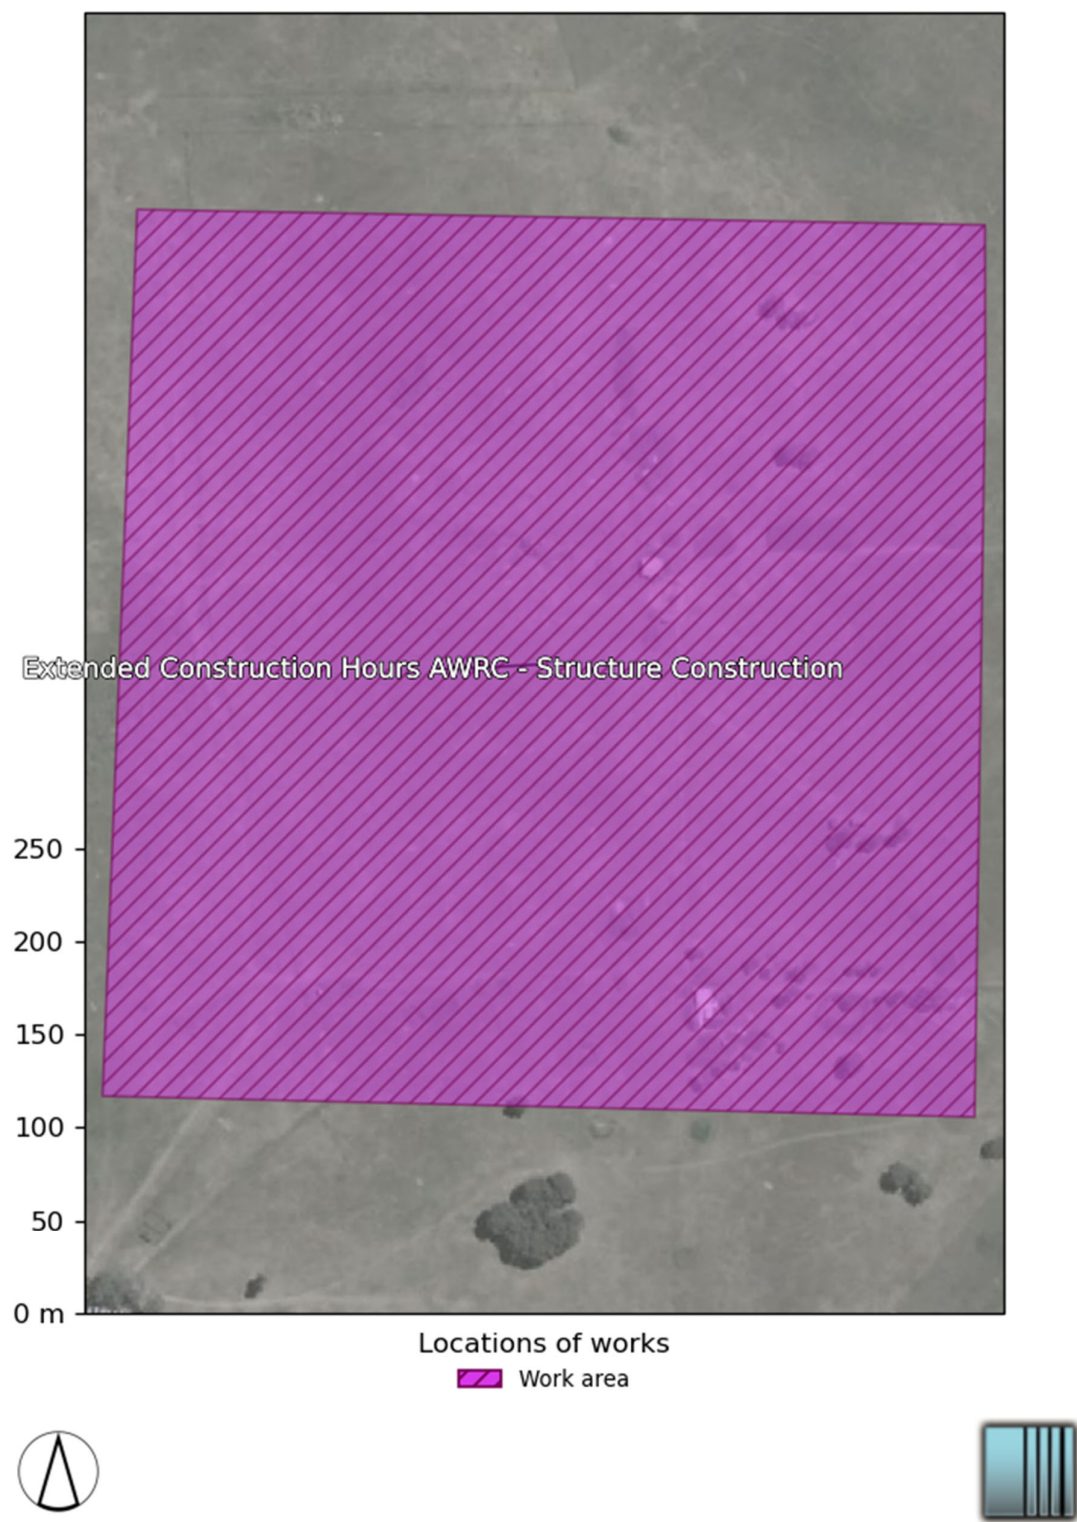

4 Construction noise and vibration impacts

4.1 Predicted noise levels

4.1.1 Construction $L_{Aeq,15min}$ assessment

Noise levels were determined by modelling the noise sources, receiver locations, and operating activities, based on the information presented in Table 2.

The noise predictions presented in this report represent a realistic worst-case scenario when construction occurs at the closest location within a specific work area. At each receiver, noise levels will vary during the construction period based on the position of equipment within the work area, the distance to the receiver, the construction activities being undertaken and the noise levels of particular plant items and equipment. Actual noise levels will often be less than the predicted levels presented.

A summary of the results is presented in Table 3. NMLs and predictions for the three worst-affected receivers for each works area are provided in Table 5. Results are presented visually in noise maps in APPENDIX C.

Table 3: Summary of receivers above relevant NMLs

| NCA | Day | | Day (OOH) | | Evening | | Night | |
|------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|
| | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties | dB(A) above NML | No. of properties |
| NCA T1 | 0 to 10 | 10 | 0 to 5 | 2 | 0 to 5 | | 0 to 5 | 0 |
| | > 10 | 0 | 6 to 15 | 10 | 6 to 15 | | 6 to 15 | 7 |
| | Over 75 dB(A) | 0 | 16 to 25 | 0 | 16 to 25 | | 16 to 25 | 5 |
| | | | > 25 | 0 | > 25 | | > 25 | 0 |
| Industrial | 0 to 10 | 0 | 0 to 5 | 0 | 0 to 5 | | 0 to 5 | 0 |
| | > 10 | 0 | 6 to 15 | 0 | 6 to 15 | | 6 to 15 | 0 |
| | Over 75 dB(A) | 0 | 16 to 25 | 0 | 16 to 25 | | 16 to 25 | 0 |
| | | | > 25 | 0 | > 25 | | > 25 | 0 |

4.2 Predicted vibration levels

The recommended MWDs for cosmetic damage and human annoyance are presented in Table 4.

Table 4: Generic minimum working distances for cosmetic damage and human annoyance

| Plant item | Reference | Minimum working distance, m | | | |
|------------------------|----------------|--------------------------------------|--------------|---------------------------------|------------------------------|
| | | Cosmetic damage (screening criteria) | | Human comfort (screening limit) | |
| | | Heritage buildings | Non-heritage | Residential ¹ | Non-residential ² |
| Piling Rig - vibratory | RTA PILING_010 | 50 | 20 | 225 | 100 |

Notes:

1. Screening limit for residences, night time
2. Screening limit for offices, schools, educational institutions and places of worship (day or night)

4.3 Mitigation measures

4.3.1 Specific reasonable and feasible mitigation measures

Site inductions will be carried out for all personnel to include potential impacts to sensitive receivers and worker behaviours. At the start of each shift a briefing regarding noise will be included as part of the pre-start to inform all personnel of the noise sensitivities of the area and works.

- Verification monitoring to be carried out at the start of out of hours works for each location to confirm predicted noise levels.
- Noise source observations to be carried out by the Environment Team at the start of the works with any additional mitigation measures or observations to be implemented.
- All equipment to be fitted with non-tonal reversing alarms.
- No swearing or unnecessary shouting or loud stereos/radios/phone calls on speaker on-site.
- No dropping of materials from height, throwing of metal items and slamming of doors
- Light vehicles and plants to be switched off when not in use.

4.3.2 Additional noise mitigation measures

In accordance with the CNVG, where, after application of all reasonable and feasible mitigation measures, the $L_{Aeq(15\text{minute})}$ airborne construction noise levels are still predicted to exceed the NMLs, additional airborne noise mitigation measures can be applied to further limit the risk of annoyance from construction noise.

Figure 2: Additional airborne noise mitigation measures

| When is the work being undertaken? | How much does the predicted noise level exceed the ANML by? | Identify additional management measures to be implemented | Additional mitigation measure code |
|--|---|---|------------------------------------|
| All Hours | 75 dB(A) or greater | V, N, PC, RO | AM2 |
| Standard Hours M-F 7am to 6pm Sat 8am to 6pm | 0 dB(A) | - | - |
| | ≤ 10 dB(A) | - | - |
| | 10 to 20 dB(A) | V, N | AM1 |
| | > 20 dB(A) | V, N | AM1 |
| OOHW Period 1 M-F 6pm to 10pm Sat 6pm to 10pm Sun/ PH 8am to 10pm | < 5 dB(A) | - | - |
| | 5 to 15 dB(A) | N, R1, DR | AM3 |
| | 15 to 25 dB(A) | V, N, R1, DR | AM4 |
| | > 25 dB(A) | V, N, SN, IB, PC, R1, DR | AM5 |
| OOHW Period 2* M-F 10pm to 7am Sat 10pm to 8am Sun/ PH 6pm to 8am | < 5 dB(A) | N | AM6 |
| | 5 to 15 dB(A) | V, N, R2, DR | AM7 |
| | 15 to 25 dB(A) | V, N, SN, IB, PC, R2, DR | AM8 |
| | > 25 dB(A) | AA, V, N, SN, IB, PC, R2, DR | AM9 |

Notes: Use the abbreviation codes in the table above to confirm management measures required

* Where OOHW occur in the evening/night shoulder period (10pm to 12am) or the night/morning shoulder period (5am to 7am) apply additional airborne mitigation measures from the OOHW Period 2, excluding AA.

N = Notification (should be issued a minimum of five working days prior to the start of works)

SN = Specific notifications (issued no later than seven calendar days ahead of construction activities)

IB = Individual briefing

PC = Phone Call

AA = Alternative accommodation**

RQ = Project specific respite offer

R1 = Respite period 1

V = Verification of predicted noise

DR = Duration respite

R2 = Respite period 2

** Where construction activity impacts receiver for more than two consecutive nights. AA is not applicable to shoulder periods.

4.3.3 Noise monitoring plan

Attended noise monitoring is to be undertaken to verify that noise levels resulting from works are in accordance with the levels predicted in this noise and vibration assessment report, subject to obtaining the property owner/occupier's consent to access the property (where required). Noise monitoring should be carried out on or near the property boundary at a location representative of the worst affected location (i.e. in publicly accessible areas on or near the nominated receivers, typically at ground level).

Table 5 identifies potential monitoring locations in each NCA, which are the three worst noise-affected receivers for each NCA from the works.

Note: Gatewave tries to find the most affected receivers in each NCA (up to 3 locations) purely based on the numerical results. These locations will be reviewed for suitability based on safety, accessibility, will provide valid data, etc. If not suitable, alternative suitable locations will be selected for verification monitoring.

If monitoring levels exceed predicted levels, continual improvement and corrective action measures will be implemented, (e.g. investigate cause, review work or activity, scheduling, etc).

Table 5: Nominated verification monitoring locations

| Receiver | | | Noise management levels (NMLs), dB(A) | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | Predicted noise levels, dB(A) Lmax |
|----------|--|-------------|---------------------------------------|---------------|-------------|-----------|--------------------------------|--------------|---|-----------|---------|-------|------------------------------------|
| NCA | Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night |
| NCA T1 | 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | 52 | 52 | - | 56 | 50 |
| NCA T1 | 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | 51 | 51 | - | 55 | 49 |
| NCA T1 | 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | 51 | 51 | - | 55 | 49 |

4.3.4 Vibration monitoring

It is noted that the generic MWDs in Table 4 are taken from a database of vibration levels measured at various sites or obtained from other sources (e.g. BS5228-2:2009). They are not specific to these works as final vibration levels are dependent on many factors including the actual plant used, its operation and the intervening geology between the activity and the receiver.

Site specific MWDs for vibration significant plant items must be measured on site where plant and equipment are likely to operate close to or within the generic MWDs for both cosmetic damage and human annoyance. These site specific MWDs will then be included in Gatewave.

If works are likely to be within the generic or site specific MWDs, attended vibration monitoring is to be undertaken to verify that vibration levels comply with the vibration objectives described in the CNVMP.

Additional monitoring for human annoyance from vibration would be carried out proactively and in response to vibration complaints.

Vibration monitoring should follow the procedures outlined in Appendix F of the CNVG.

Important disclaimer

* This document has been partly automatically generated by Gatewave™, software for prediction, assessment and management of noise and vibration, developed by Renzo Tonin and Associates.

* This document is uncontrolled. Please contact Renzo Tonin and Associates if you suspect there are any errors in this report.

* Results in this report are based on the assumptions described in Section 0 and inputs presented in Section 3. Noise and vibration monitoring data will be collected to ensure Gatewave is verified and adjusted, if required.

* Renzo Tonin and Associates cannot be held liable for the misuse of the software Gatewave™, including any errors that may be contained within the software.

APPENDIX A Summary of works

A.1 Plant and equipment

Table 6: Plant and equipment schedule for work area: **Extended Construction Hours AWRC - Structure Construction**

| Equipment | Penalty, dB(A) | Quantity | Intensity | Reduction, dB | Sound power level, dB(A) | | Start time | End time |
|---|----------------|----------|-----------|---------------|--------------------------|------|--------------------------|--------------------------|
| | | | | | Leq,15min | Lmax | | |
| Extended Construction Hours AWRC - Structure Construction | | | | | | | | |
| Concrete Agi | - | 50 | 100% | 0 | 125 | 111 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | - | 50 | 100% | 0 | 125 | 111 | Saturday 06:00:00 | Saturday 18:00:00 |
| Mobile crane (20t-250t) | - | 2 | 20% | 0 | 100 | 108 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Piling Rig - vibratory | 5 | 1 | 100% | 0 | 121 | 119 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Concrete pump | - | 2 | 80% | 0 | 105 | 107 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Concrete vibrator | - | 4 | 100% | 0 | 103 | 100 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Light vehicles | - | 6 | 10% | 0 | 87 | 100 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Road truck (deliveries to site) | - | 8 | 10% | 0 | 105 | 111 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| EWP | - | 4 | 25% | 0 | 95 | 98 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| | - | 2 | 50% | 0 | 99 | 103 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |

| Equipment | Penalty, dB(A) | Quantity | Intensity | Reduction, dB | Sound power level, dB(A) | | Start time | End time |
|----------------------------------|----------------|----------|-----------|---------------|--------------------------|------------------|--------------------------|--------------------------|
| | | | | | L _{eq,15min} | L _{max} | | |
| Telehandler / Franna crane (20t) | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Generator | - | 2 | 100% | 0 | 97 | 95 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Handtool - rattle gun | - | 8 | 20% | 0 | 109 | 118 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |
| Water cart | - | 2 | 25% | 0 | 101 | 107 | Monday - Friday 05:00:00 | Monday - Friday 07:00:00 |
| | | | | | | | Saturday 06:00:00 | Saturday 18:00:00 |

APPENDIX B Detailed construction noise results

Table 7: Construction noise results

| Receiver | | Noise management levels (NMLs), dB(A) | | | | Sleep disturbance goals, dB(A) | | Predicted noise levels, dB(A) Leq,15min | | | | Predicted noise levels, dB(A) Lmax | |
|---|-------------|---------------------------------------|---------------|-------------|-----------|--------------------------------|--------------|---|-----------|---------|-------|------------------------------------|-------|
| Address | Land use | NML Day | NML Day (OOH) | NML Evening | NML Night | Lmax (screening) | Lmax (limit) | Day | Day (OOH) | Evening | Night | Night | Night |
| 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 56 | - | 56 | 50 | |
| 203-229 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 55 | - | 55 | 49 | |
| 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 55 | - | 55 | 49 | |
| 919-929 MAMRE ROAD, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 52 | - | 52 | 46 | |
| 237-247 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 52 | - | 52 | 46 | |
| 235-245 CLIFTON AVENUE, KEMPS CREEK, NSW ¹ | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 51 | - | 51 | 45 | |
| 949-965 MAMRE ROAD, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 51 | - | 51 | 45 | |
| 230-234 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 51 | - | 51 | 45 | |
| 258 CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 51 | - | 51 | 45 | |
| 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 50 | - | 50 | 44 | |
| 1669A ELIZABETH DRIVE, BADGERYS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 48 | - | 48 | 42 | |
| 146B CLIFTON AVENUE, KEMPS CREEK, NSW | Residential | 45 | 40 | 40 | 36 | 55 | 65 | - | 46 | - | 46 | 40 | |


Note: ¹237-247 Clifton Avenue does not exist, the receiver is replaced with 257 Clifton Avenue which is not identified in the noise model.

APPENDIX C Noise level above nominated target

Noise level above NML Day (area 1 of 4)



Noise level above NML Day (area 2 of 4)

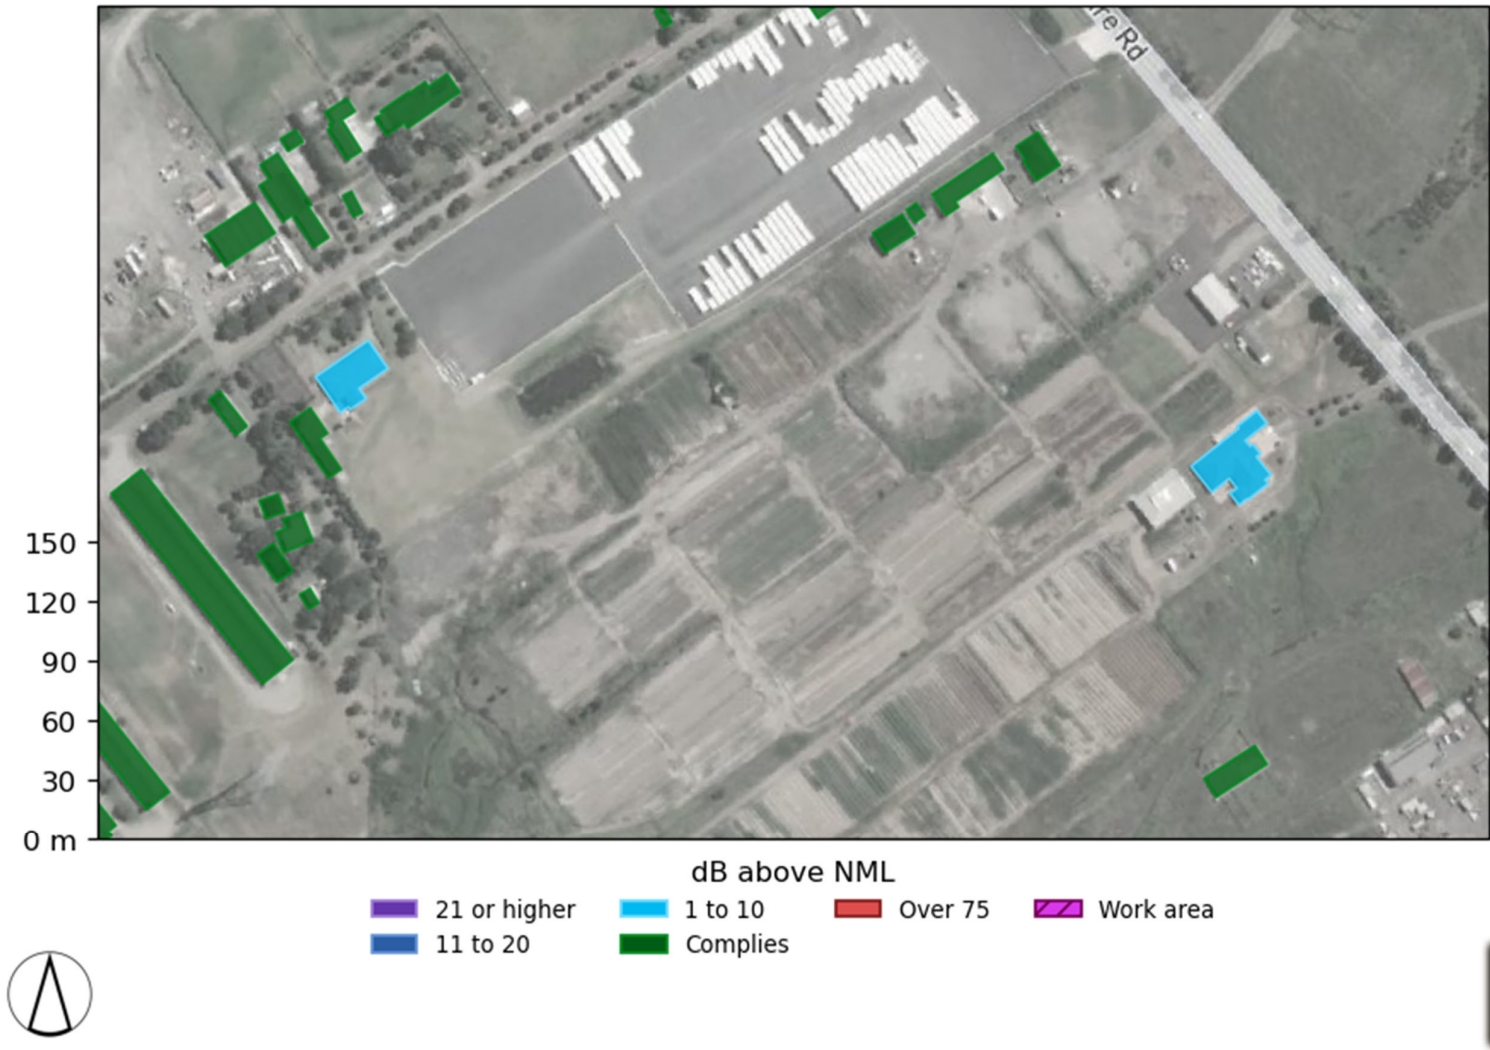

Noise level above NML Day (area 3 of 4)




Noise level above NML Day (area 4 of 4)



Noise level above NML Day (OOH) (area 1 of 4)



Noise level above NML Day (OOH) (area 2 of 4)

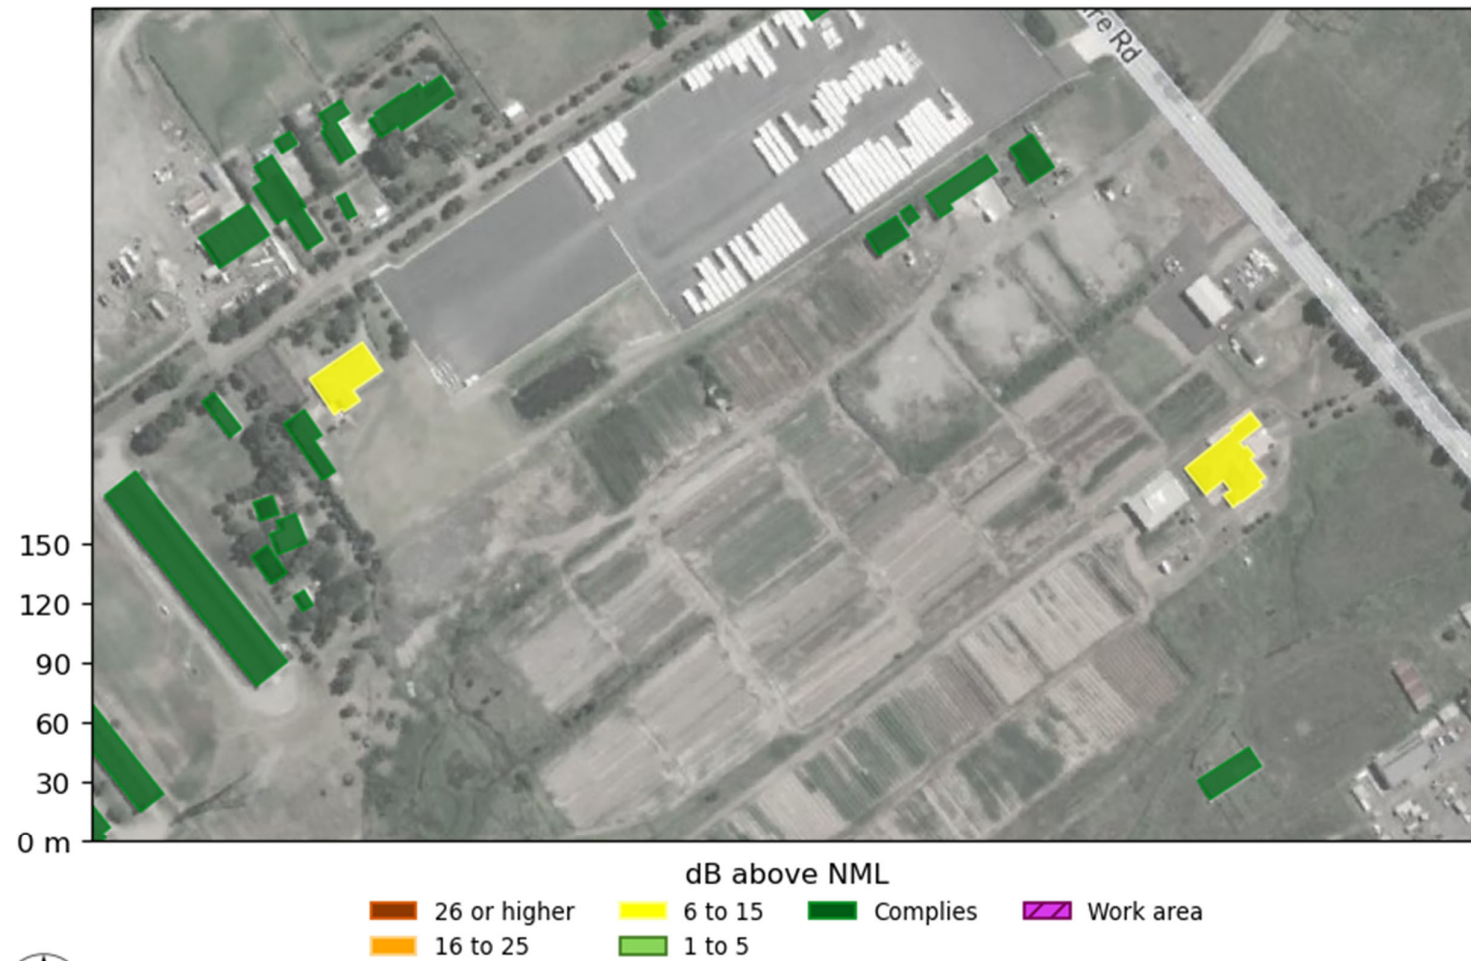


Noise level above NML Day (OOH) (area 3 of 4)




Noise level above NML Day (OOH) (area 4 of 4)



Noise level above NML Evening (area 1 of 4)

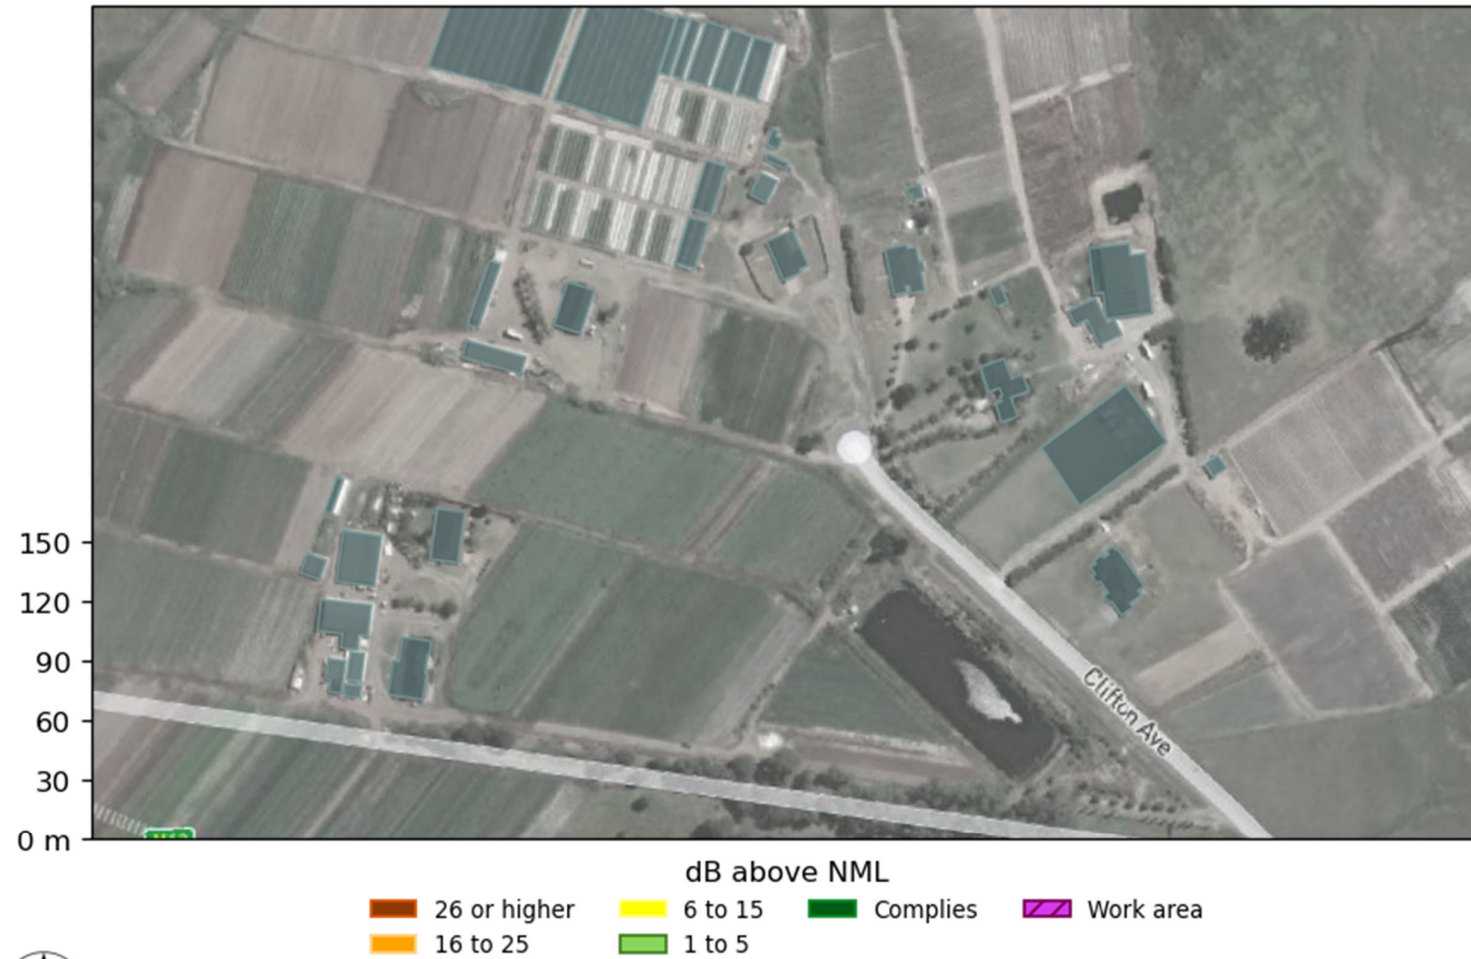

Noise level above NML Evening (area 2 of 4)

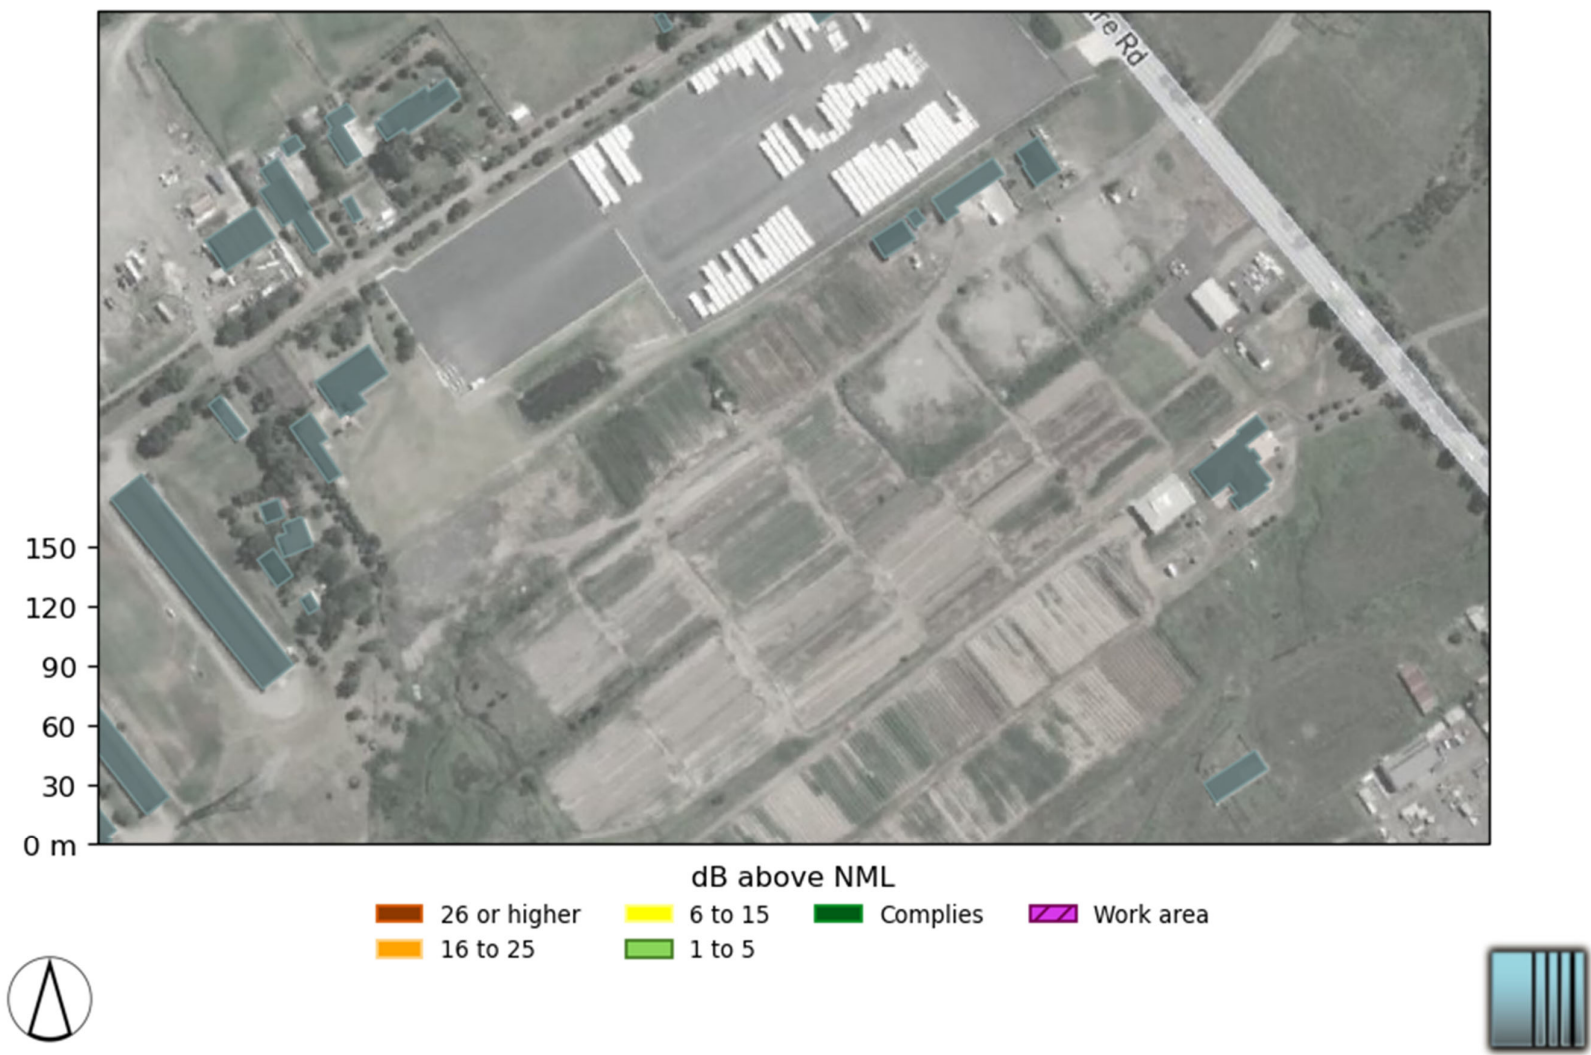

Noise level above NML Evening (area 3 of 4)



Noise level above NML Evening (area 4 of 4)



Noise level above NML Night (area 1 of 4)



Noise level above NML Night (area 2 of 4)



Noise level above NML Night (area 3 of 4)



Noise level above NML Night (area 4 of 4)

