
1 May 2026

Working in your area – Electrical installation Hornby Street / Oxenbridge Drive Intersection

Thank you for your patience as Sydney Water builds new water, wastewater, and recycled water infrastructure, to service growing communities in the Wilton area.

To support this infrastructure, Sydney Water contractors need to install new electrical infrastructure in Hornby Street. This work involves installing conduits from the existing low voltage (LV) pillar located within the council verge outside 19 Oxenbridge Avenue, extending across Hornby Street (refer map below).

The existing LV pillar outside 19 Oxenbridge Avenue may also require upgrading, subject to further investigation and detailed design. In addition, a control panel and pit will be installed in Hornby Street, with the final location and design currently being determined. We estimate this work to commence late July.

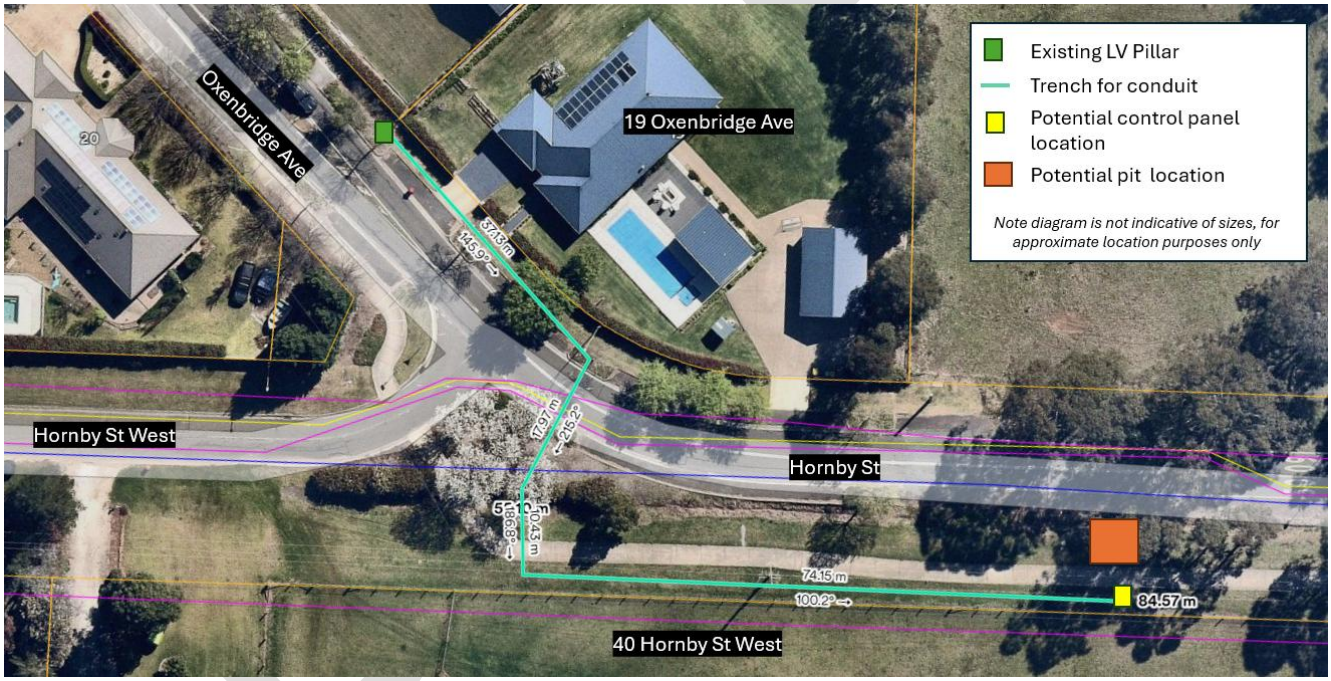

The work will involve:

- Removal of turf for excavation of conduit pits approximately 1m deep and 0.6m wide
- Installing environmental controls
- Excavation work
- Spoil removal
- Installation of new electrical infrastructure pending design
- Possible upgrade to existing LV Pillar
- Reinstating disturbed areas to existing conditions

Sydney Water Corporation ABN 49 776 225 038
1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124
Telephone 13 20 92 **Media (24/7)** 8849 5151 **sydneywater.com.au**

What is an LV Pillar?

An LV Pillar is a network connection point used in areas where the low voltage supply is underground. The LV Pillar is around 50cm high and provides a connection between the Endeavour Energy network and the new Sydney Water infrastructure.

Prior to installation, Endeavour Energy and Sydney Water Delivery Partner, Acciona, will notify residents to inform of any network disruptions.



Example of a LV Network Pillar

Traffic and Access

We estimate no changes to current road closures and detours currently in place on Hornby Street and Hornby Street West. You may experience minor traffic delays during the day, particularly when heavy vehicles are moving spoil from the site.

Traffic controllers will be positioned on nearby streets to ensure safe vehicle movements during work hours. Residents will have full access to their properties at all times.

More information

If you have any questions or want to learn more about our work, please contact our Community Engagement Team:

- **Call:** 1800 678 098
- **Email:** wiltonnewtown@sydneywater.com.au

You are also welcome to visit us at our community drop-in centre at 150 Condell Park Road, Wilton.

Thank you for your patience and cooperation during this essential work.

Yours sincerely,

(to be signed before distribution)

Senior Project Manager – Major Projects

Interpreter Service 13 14 50
Arabic • Chinese • Greek • Italian • Korean • Vietnamese
إذا كنت تحتاج إلى مترجم، يرجى الاتصال بالرقم أعلاه.
如果您需要傳譯員的協助，請致電以上的號碼。
Αν χρειάζεστε διερμηνέα, τηλεφωνήστε στον παραπάνω αριθμό.
Se vi serve un interprete, telefonate al numero indicato sopra.
통역사가 필요하시면 위의 번호로 전화하십시오.
Nếu quý vị cần thông dịch viên, hãy gọi đến số trên đây.

DRAFT